**1. PLUG : Type HG/TR**

(Transparent)

Molded plug according to	: NEMA 5- (HOSPITAL GRADE)
Front side marking	: green dot
Rated current and voltage	: 15A, 125 V AC
Plug base	: PA6.6 GF
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: grounding O.D. 4,80 mm line & neutral 6,20 mm x 1,40 mm
Outer mold	: PVC compound, hardness Shore A89 +/- 3
Approvals	: UL, CSA
SCIP database	: d790a47a-25a5-40e1-95bc-2017a434eeb9

2. CORD : Type SJT3x18AWG**BLACK**

Flexible cord according to	: UL62, CSA 22.2 N°49
Marked	: *JF*UL*E41542*SJT*3x18AWG- (0,82mm ²)*60C*300V*FT2*CSA
Number of cores	: 3
Conductor construction	: 46x0,15 mm O.D. 1,22mm
Conductor insulation	: Extruded PVC , O.D. 2,80mm +/-0,05mm
Jacket	: Extruded PVC, O.D. 7,70mm +/- 0,20mm
Temperature rating	: -20°C up to +60°C
Resistance of conductors	: max. 22,37 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: green, black, white
Approvals	: UL, CSA

3. CONNECTOR : Type C13

Molded connector according to	: EN/IEC60320/C13, UL817, C22.2N°.21
Rated current and voltage	: 10A, 250 Vac
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE, UL, CSA,


ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity test : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

COMAREL

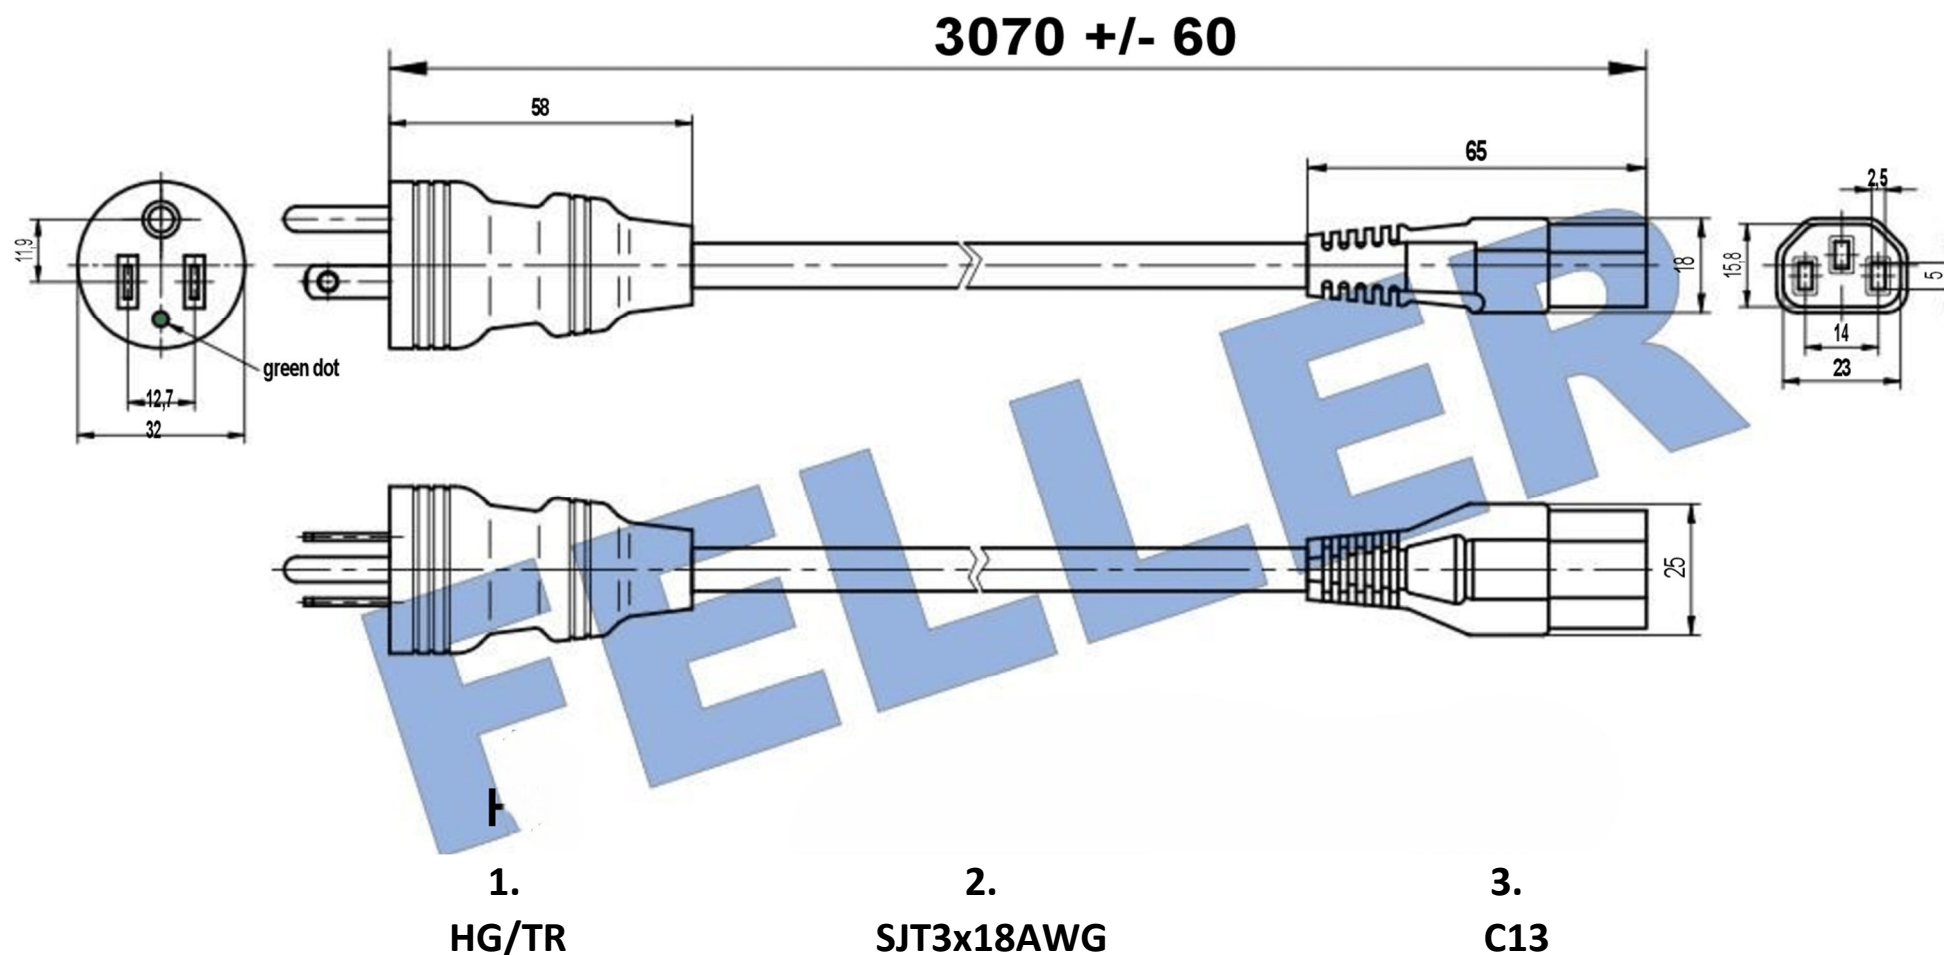

Feller Type : HG/TR - SGT3x18AWG - C13 / 3,00m Black

(L264)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z