

1. **PLUG : XVIIIG**

Molded plug according to	: CEE (7) XVII
Rated current and voltage	: 10A, 250 V AC
Plug base	: PA GFR
Pins	: brass, nickel-plated, annealed with copper
Pins outer diameter	: 4,8 mm
Outer mold	: PVC compound
Approvals	: VDE,OVE,CEBEC,KEMA,S,D,N,F,NF,IMQ
SCIP database	: 20ede9ea0-37a8-4ba2-a3c3-3154a8837acb V1 2020.11.19

2. **CORD : Type H05VVF2X1,00 mm2**

BLACK SW9005

Flexible cord according to	: OVE K41a,EN 50525, AS3191, IEC 60227
Marked	: *JF*<OVE><HAR>H05VVF2X1,0mm2-*N1095*CE*CCC 227 IEC 53 (RVV) 300/500V 2x1,0
Number of cores	: 2
Conductor construction	: 31x0,195 mm O.D. 1,25 mm
Conductor insulation	: Extruded PVC O.D. 2,40 mm +/-0,05 mm
Jacket	: Extruded PVC O.D. 6,40 +/- 0,20 mm
Resistance of conductors	: max. 19,5 Ω /km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: >0,010 M Ω /km
Color of conductors	: brown, blue
Approvals	: HARMONIZED,OVE,SAA,CCC

3. **CONNECTOR : Type C17**

Molded connector according to	: EN/IEC60320/C17
Rated current and voltage	: 10A, 250 VAC
Construction	: double insulation
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PBTP GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC

ENVIRONMENTAL CONFORMITY


EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%
Visual inspection : 100%
Polarity test : yes

High pot test wire to wire: 3kVac for 2 sec
Skin high pot test : 6kVac line to skin

COMAREL

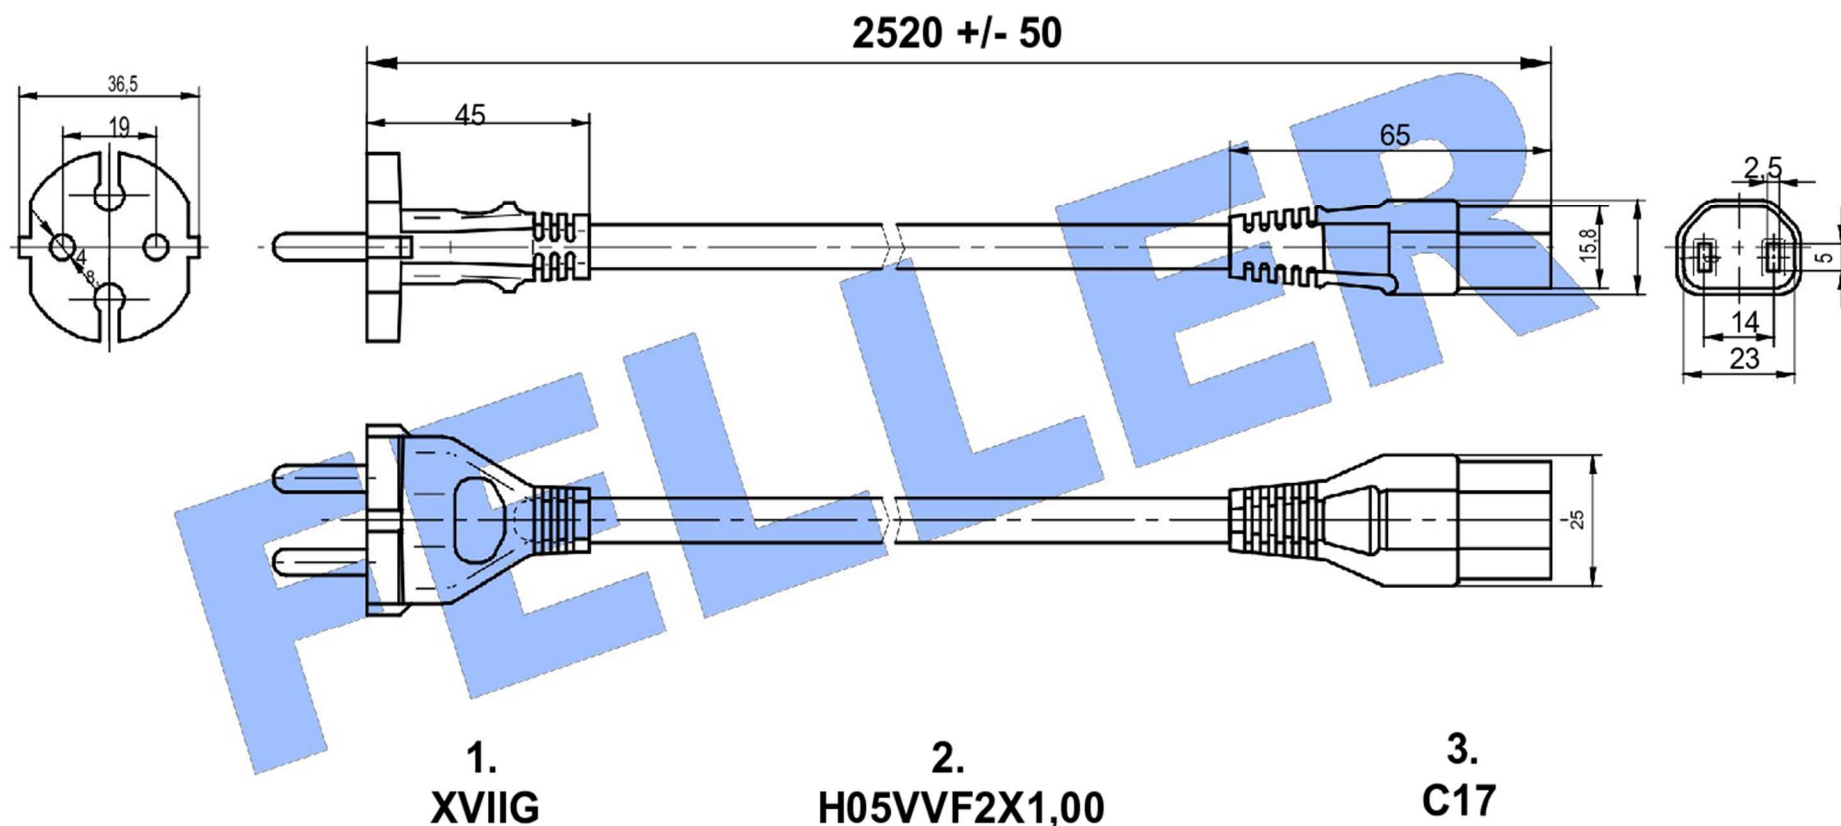

Type : XVIIIG - H05VVF2x1,00 - C17 / 2,50m black

(code stock : L38)

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z