

**PLUG : XVI**

Molded plug according to	: EN50075
Rated current and voltage	: 2,5A, 250 V AC
Plug base	: PA GFR
Construction	: double insulation, contacts crimped
Pins	: brass, nickel-plated, parts-sleeved
Pins outer diameter	: 4,0 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: ENEC
SCIP Database (Feller)	: d1e45c90-9d29-4e67-9439-0fe7da594589

CORD : Type H03VVH2F2x0,75 mm2**BLACK SW9005**

Flexible cord according to	: OVE K41a, HD 21.S2, AS3191
Marked	: *JF*<OVE><HAR>H03VVH2F2x0,75*N1095*CE
Number of cores	: 2
Conductor construction	: 23x0,20 mm O.D. 1,10 mm
Conductor insulation	: Extruded PVC O.D. 2,10 mm +/-0,05 mm
Jacket	: Extruded PVC O.D. 3,30x5,40 mm +/- 0,20 mm
Resistance of conductors	: max. 22,37 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: >0,010 MΩ/km
Color of conductors	: brown, blue
Approvals	: HARMONIZED, OVE

CONNECTOR : Type C7


Molded connector according to	: EN/IEC60320/C7
Rated current and voltage	: 2,5A , 250 VAC
Construction	: double insulation
Contacts of the connection	: phosphor bronze CuSn6, crimped
inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC

ENVIRONMENTAL CONFORMITY

EU-Directive 2002/96/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Skin high pot test : 6kVac line to skin
Polarity test : yes	

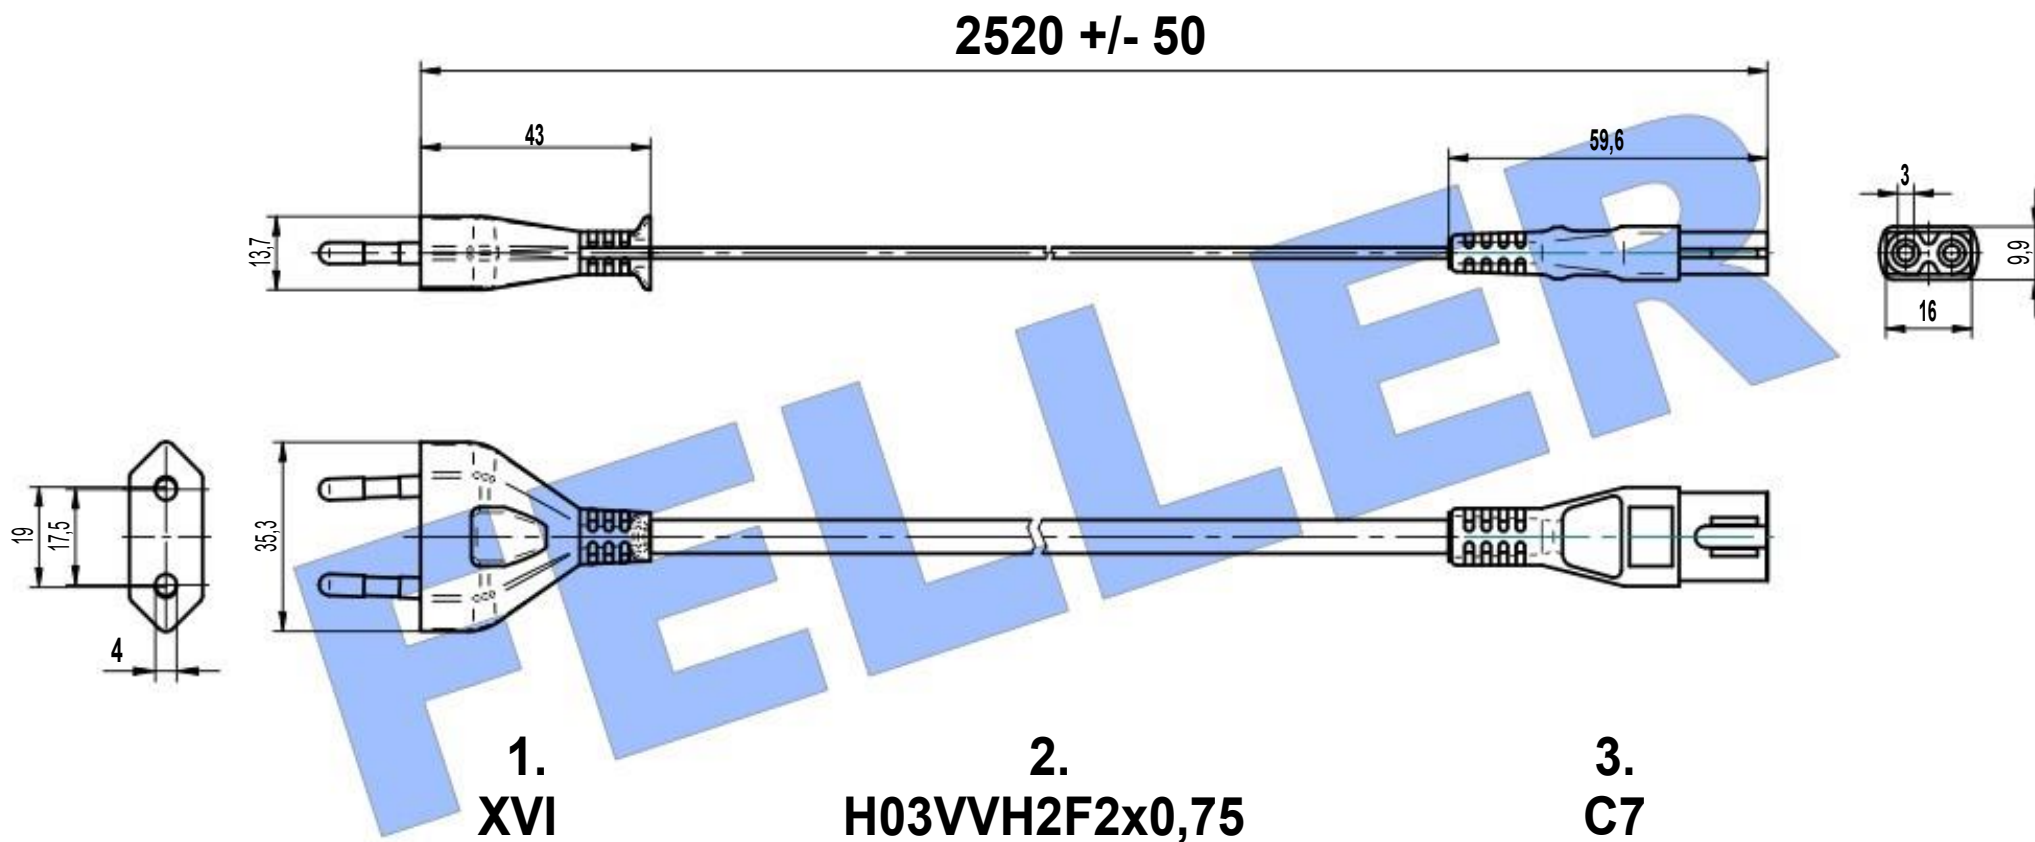

Type : (L465) XVI-H03VVH2F2X075-C7/2,50m Black

All dimensions in mm

RoHS compliant

COMAREL 

Tel : '33) 1 34 13 72 80
 mail : info@comarel.fr
 site : www.comarel.fr