**1. PLUG : Type IL/3G**

Molded plug according to	: SI 32
Rated current and voltage	: 16A, 250 V AC
Plug base	: PA 6.6 30% GF
Pins	: brass, nickel-plated, crimped
Pins outer diameter	: 4,40 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: SII
SCIP Database	: 106f1a83-b757-4da0-87a4-62c7b2a11168

2. CORD : Type H05VVF3G1,00 BLACK

Flexible cord according to	: EN 50525-1, EN 50525-2-11, EN 50395, EN 50396, AS 3191
Marked	: *JF*<ÖVE><HAR>H05VVF3G1,0mm2*N1095*CE*CCC 60227 IEC 53(RVV) 300/500V 3X1,00mm2*KTL SW01001-2001*SNI MARK* SNI 04-6629.5 Cu/PVC/PVC-f
Number of cores	: 3
Conductor construction	: 31x0,20 mm O.D. 1,25mm
Conductor insulation	: Extruded PVC O.D. 2,40mm +/-0,05mm
Jacket	: Extruded PVC O.D. 6,80mm +/- 0,20mm
Temperature rating	: -20°C up to +70°C
Resistance of conductors	: max. 19,5 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: <HAR>, SAA, ÖVE, CCC, KTL, SNI

3. CONNECTOR : Type C13

Molded connector according to	: EN/IEC60320/C13
Rated current and voltage	: 10 A, 250 V
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC, SII, EAC, CCC, KTL, UL, CSA, PSE(JET)

ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)

EU-Directive 2011/65/EU

TESTING

EU-Directive 1907/2006 EG (REACH -compliant)

Electrical testing : 100%

High pot test wire to wire: 3kVac for 2 sec


Visual inspection : 100%

Continuity : 25Aac to grounding /20Aac to line and neutral

Polarity test : yes

Skin high pot test : 6kVac line to skin

COMAREL

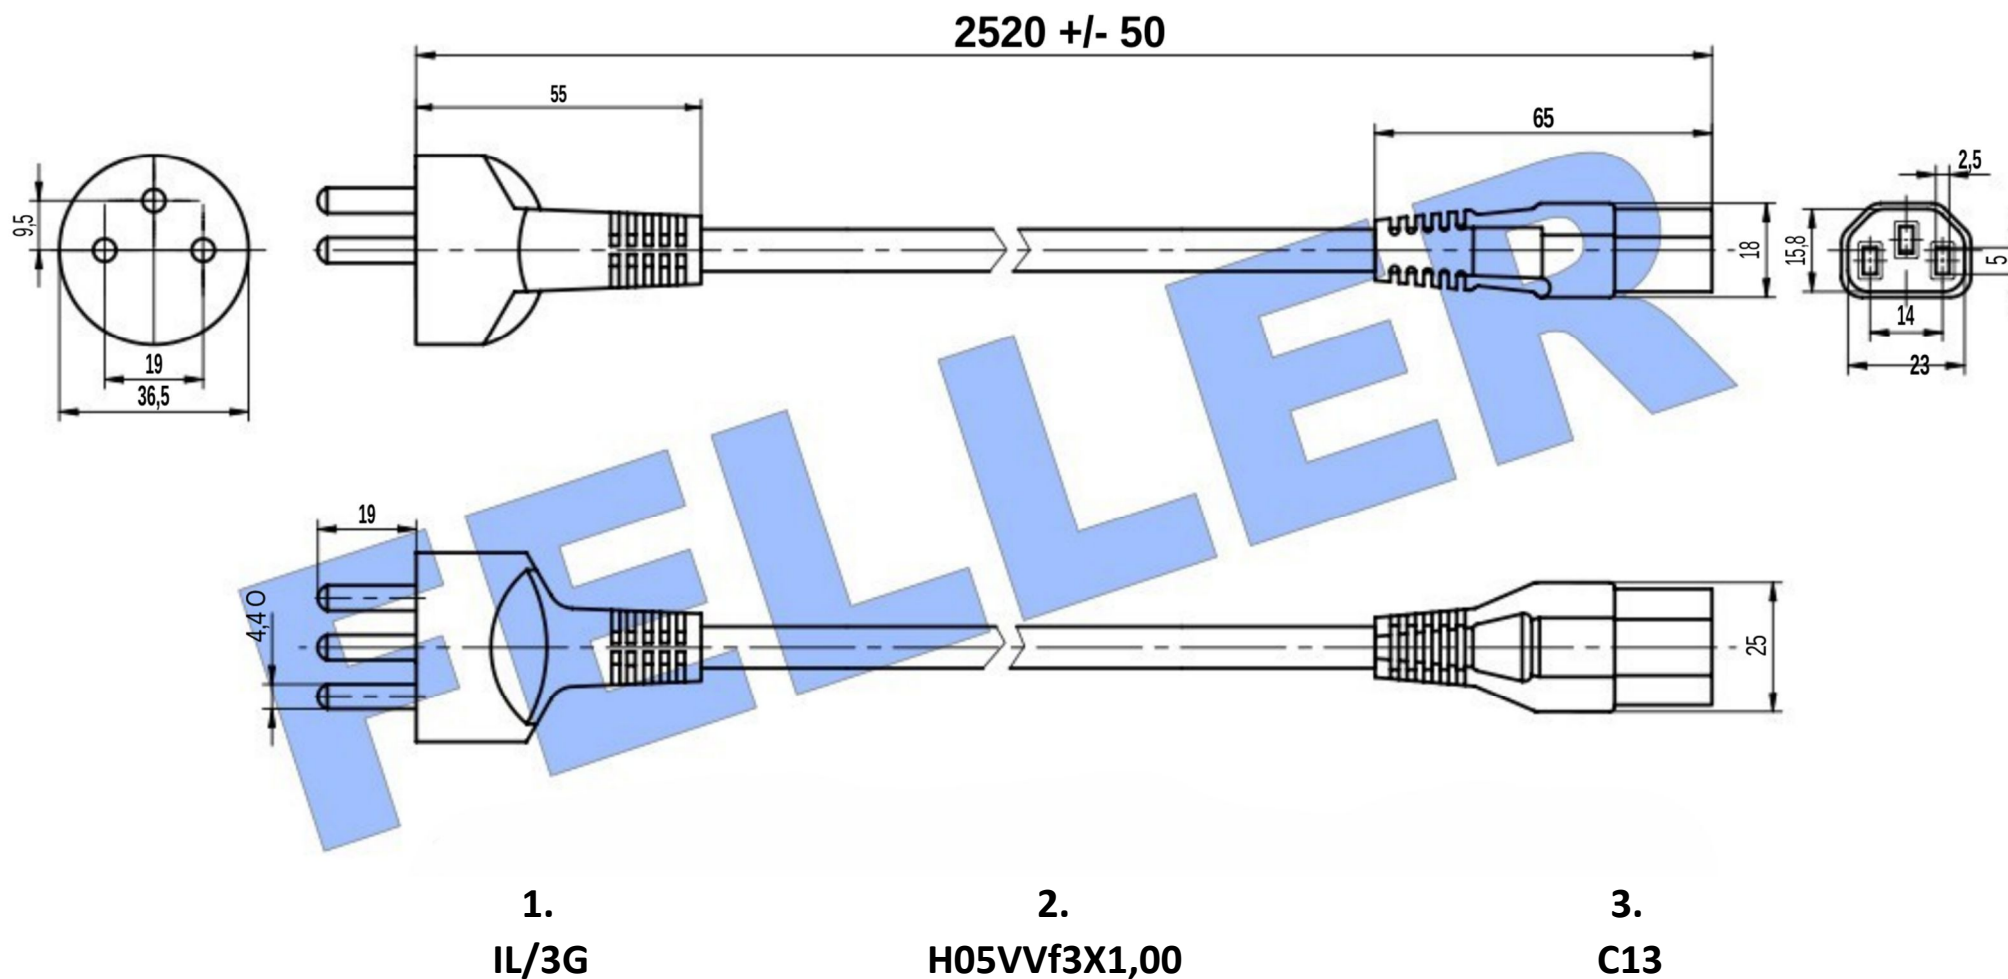

Feller Type : IL3/G - H05VVF3G1,00 - C13 / 2,50m Black

(L75)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z