

**1. PLUG : Type C14G****(HALOGEN FREE)**

Interconnection coupler according to	: EN/IEC 60320-2-2/E,
Rated current and voltage	: 10A, 250 V AC
Plug base	: PPO GFR
Construction	: double insulated
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: 4,00 mm x 2,00 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: OVE
SCPI Database	: f11f2d33-0014-4c1e-afbc-cfccfb97c1c V1 2020.11.19

2. CORD : Type H05Z1Z1F3G1,00**(HALOGEN FREE) BLACK**

Flexible cord according to	: HD21.14 S1, OVE E8241-14
Marked	: *JF*<O VE><HAR>H05Z1Z1F3G1,0mm2*HFFR*CE or *xxx*<VDE>*<HAR>*H05Z1Z1-F HFFR
Number of cores	: 3
Conductor construction	: 23x0,20 mm O.D. 1,30mm
Conductor insulation	: Extruded PVC O.D. 2,40mm +/-0,05mm
Jacket	: Extruded PVC O.D. 6,80mm +/- 0,20mm
Resistance of conductors	: max. 26 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: HARMONIZED, ÖVE (VDE)

3. CONNECTOR : Type C13**(HALOGEN FREE)**

Molded connector according to	: EN/IEC60320/C13,
Rated current and voltage	: 10A, 250 Vac
Construction	: double insulation
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: TPE-S, hardness Shore A 78-82
Approvals	: CE, ENEC

ENVIRONMENTAL CONFORMITY


EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%
 Visual inspection : 100%
 Polarity test : yes

High pot test wire to wire: 3kVac for 2 sec
 Continuity : 25Aac to grounding /20Aac to line and neutral
 kin high pot test : 6kVac line to skin

COMAREL

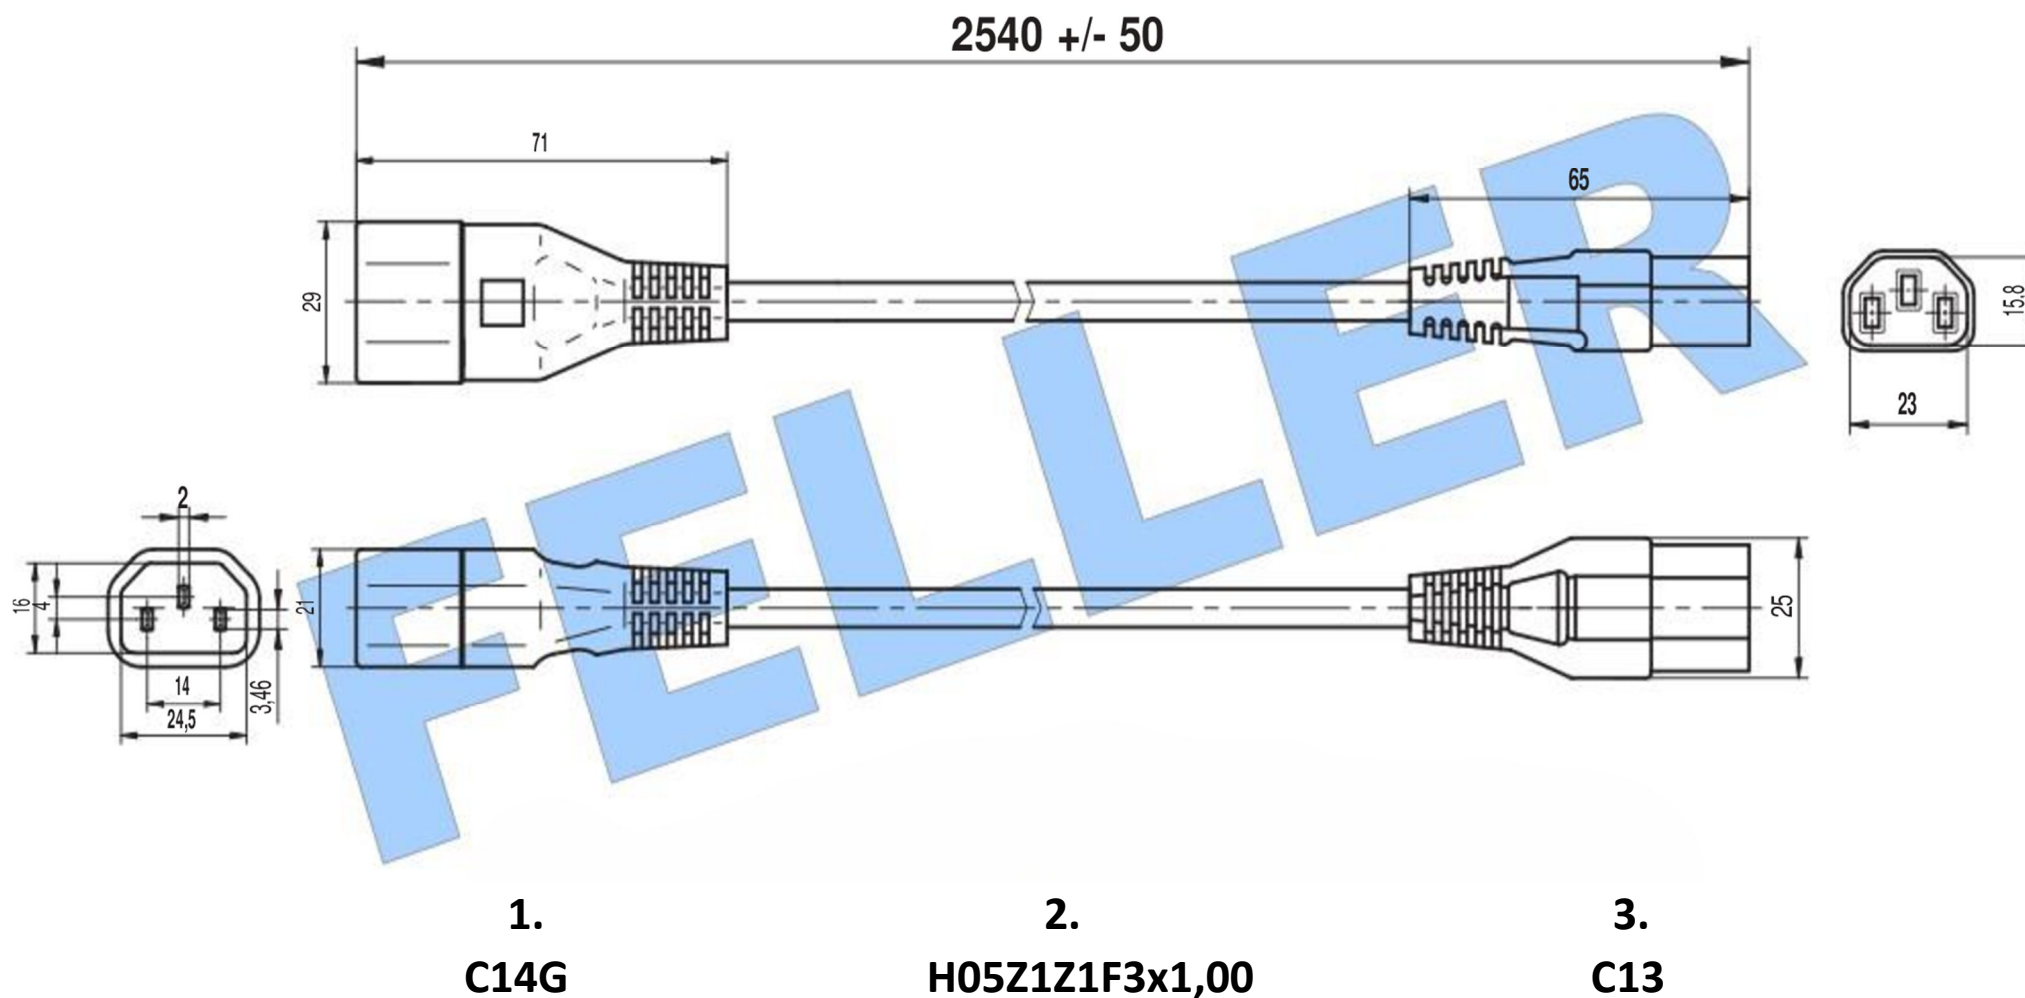

Feller Type : C14G - H05Z1Z1F3G1,00 - C13 / 2,50m Black

(L96)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z