

FELLER GMBH

A-2525 GUENSELSDORF, AUSTRIA - TEL.: . . 43(2256) 62 32 50 - FAX: . . 43 (2256) 62 32 57
e-mail: sales@feller-at.com <http://www.feller-at.com>

Description: VIIG-H05VVF3G100-G25/2,50M BLACK RAL9005 (L28)
Rating of power cord: Europe: 10A/250Vac Korea: 16A/250Vac

1. PLUG: Type VIIG

Molded plug according to	: IEC60884, CEE (7) VII, KSC8305
Rated current and voltage	: 16A, 250 V AC
Plugbase	: thermoplastic Polyester (PBTP) GFR
Construction	: double insulated
Pins	: brass, nickel-plated, crimped
Pins outer diameter	: 4,8 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: VDE, ÖVE, CEBEC, KEMA, S-INTERTEK, D, N, FI, NF, IMQ, EAC, KTL

2. CORD: Type H05VVF3G1,00mm²

Flexible cord according to	: ÖVE K41a; EN50525; AS 3191, IEC 60227
Marked	: *JF*<ÖVE><HAR>H05VVF3G1,0mm ² *N1095*CE*CCC 60227 IEC 53(RVV) 300/500V 3X1,0*KTL SW01001-2001A
Number of cores	: 3
Conductor construction	: 31x0,20 mm O.D. 1,25mm
Conductor insulation	: Extruded PVC O.D. 2,40mm
Jacket	: Extruded PVC O.D. 6,80mm +/- 0,20mm
Temperature rating	: -20°C up to +70°C
Resistance of conductors	: max. 19,5 Ω/km
Dielectric strength	: 2kVac, 1min.
Insulation resistance	: >0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: HARMONIZED, SAA, ÖVE, CCC, KTL

3. 2nd end: G25

Jacket 25 mm removed


Environmental conformity	: EU-Directive 2012/19/EU (WEEE)
	: EU-Directive 2011/65/EU
	: EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing	: 100%
Visual inspection	: 100%
High pot test wire to wire	: 3kVac for 2 sec.
Continuity test	: 25Aac to grounding / 20Aac to line and neutral
Polarity test	: yes
Skin high pot test	: 6kVac line to skin

design subject to change without prior notice

DATE of ISSUE:		March, 2016	
REV: 1	1	ORIG:	lg

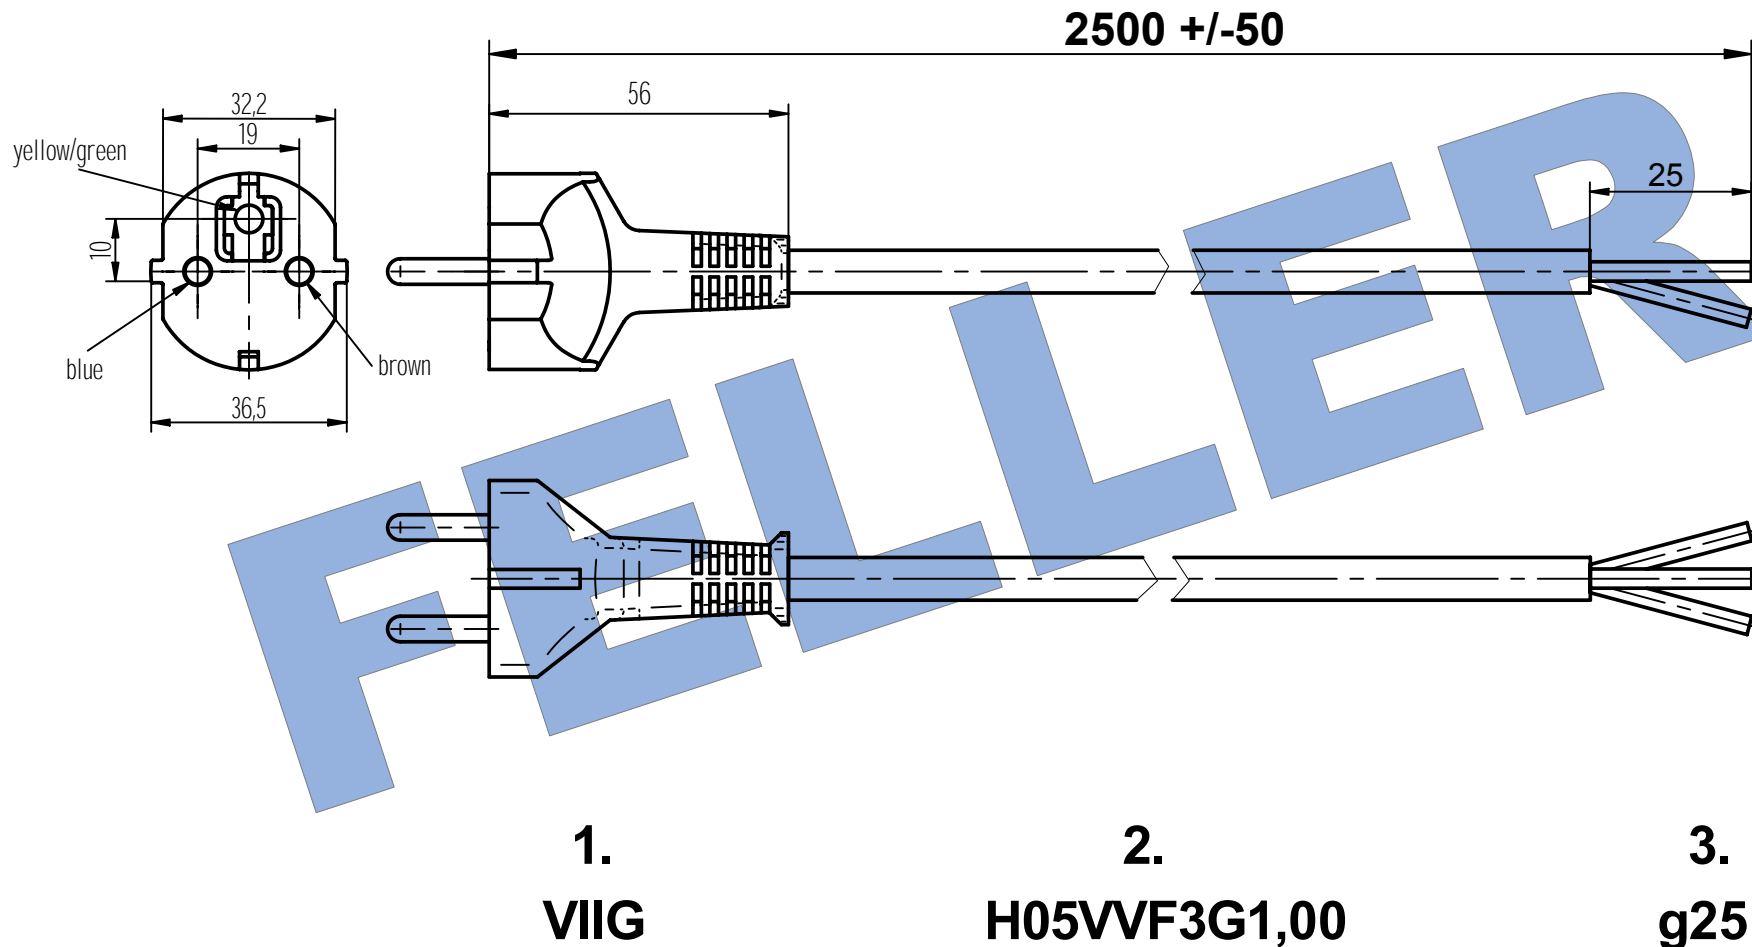

Feller Type: VIIG-H05VVF3G100-G25/2,50M BLACK (L28)

FELLER 

A-2525 Günselsdorf, Austria

Telefon 0043-2256-62325-0

Fax: 0043-2256-62325-7

email: sales@feller-at.com

<http://www.feller-at.com>

21.03.2016

lgAR

All dimensions in mm

RoHS compliant