

Description: SAA/2-H03VVH2F2x0,75-C7/ 1,80m, black
Rating of cord set: 2,5A, 250 Vac

(L33)

1.PLUG: Type SAA/2

Molded plug according to : AS/NZS 3112:2000
Rated current and voltage : 10A, 250V AC
Plugbase : PPO GFR
Pins : solid brass, nickel plated, part insulated, crimped
Pins dimension : 6,35 mm x 1,63 mm
Outer mold : PVC compound, hardness Shore A75-77
Approvals : SAA

2. CORD: Type H03VVH2F2X0,75 mm²

Flexible cord according to : ÖVE K41a, HD 21.S2; AS3191
Marked : *JF*<ÖVE><HAR>H03VVH2F2X0,75*N1095*CE
Number of cores : 2
Conductor construction : 23x0,2 mm O.D. 1,10mm
Conductor insulation : Extruded PVC, O.D. 2,10mm
Jacket : Extruded PVC, 3,30 mm x 5,40mm +/-0,20mm
Electrical resistance of conductors : max.26 Ohm/km
Dielectric strength : 2000 Vac, 1min.
Insulation resistance : 500Vdc>50Mohms
Color of conductors : brown, blue
Approvals : HARMONIZED, VDE, ÖVE, CEBEC, KEMA, S, D, N, FI, SEV, UTE, IMQ, BSI, SAA

3. CONNECTOR: Type C7

Molded connector according to : EN 60320/C7, UL 817
Rated current and voltage : 2,5 A, 250 V AC
Construction : double insulation
Contacts of the connection : phosphor bronze CuSn6
Inner insulation : PPO GFR
Outer mold : PVC compound, hardness Shore A 75-77
Approvals : ENEC, SAA, UL, CSA




Environmental conformity : EU-Directive 2002/96/EC (WEEE)
EU-Directive 2003/11/EC (Council Directive 76/769/EEC)
EU-Directive 2002/95/EC (RoHS-compliant)

TESTING

Electrical testing : 100%
Visual inspection : 100%
High pot test wire to wire : 3.000Vac for 2 sec.
Continuity test : 20Aac to line and neutral
Skin high pot test : 6.000Vac line to skin

Tolerances not indicated in the drawing: +/- 2 %
design subject to change without prior notice

DATE of ISSUE:	July, 2005
REV: 4	1
ORIG:	mk

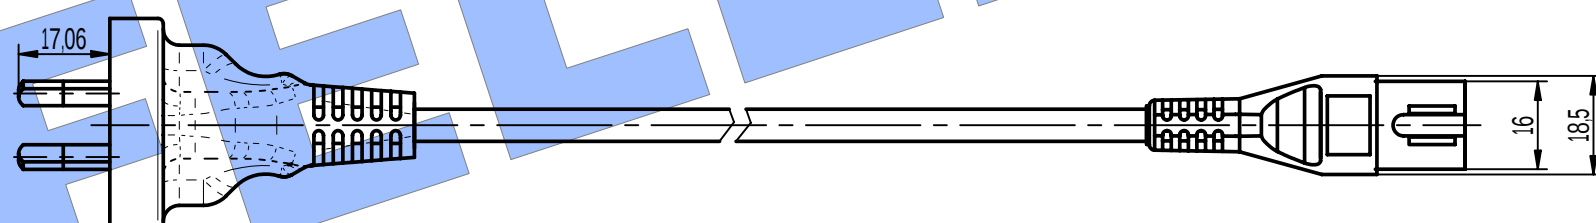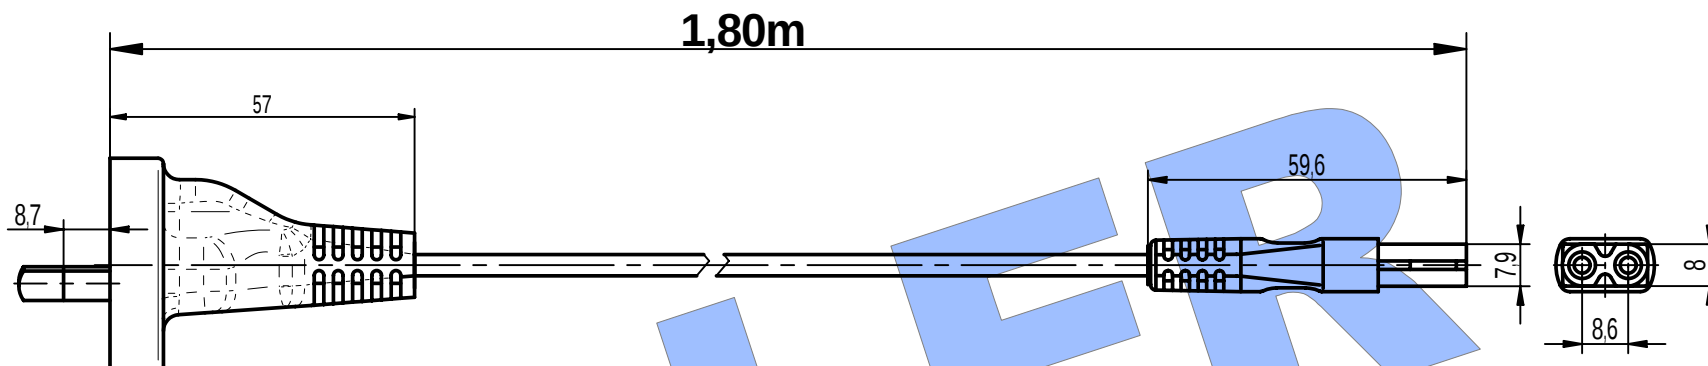

1.
SAA/2

2.
H03VVH2F2X0,75

3.
C7

Feller Type: SAA/2-H03VVH2F2X0,75-C7 / 1,80m black (L33)

RoHS compliant

17.06.05

All dimensions in mm

FELLER 

A-2525 Günselsdorf, Austria

Telefon 0043-2256-62325-0

Fax: 0043-2256-62325-7

email: sales@feller-at.com

<http://www.feller-at.com>