

Description: RA/2-H03VVH2F2x0,75-C7/1.80m, black

Rating of cord set: 2.5A , 250 V AC

1. PLUG: Type RA/2

Molded plug according to	: IRAM 2063
Rated current and voltage	: 10A, 250V AC
Plugbase	: PPO GFR
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: 6,25 mm x 1,55 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: IRAM

2. CORD: Type H03VVH2F2X0,75 mm²

Flexible cord according to	: ÖVE K41a, HD 21.S2; AS3191
Marked	: *JF*<ÖVE><HAR>H03VVH2F2X0,75*N1095*CE
Number of cores	: 2
Conductor construction	: 23x0,2 O.D. 1,10mm
Conductor insulation	: Extruded PVC, O.D. 2,10mm
Jacket	: Extruded PVC, 3,30x5,40mm +/-0,20mm
Electrical resistance of conductors	: max.26 Ohm/km
Dielectric strength	: 2000 V
Approvals	: HARMONIZED, VDE, ÖVE, CEBEC, KEMA, S, D, N, FI, SEV, LCIE, IMQ, BSI, SAA

3. CONNECTOR: Type C7


Molded connector according to	: EN 60320/C7
Rated current and voltage	: 2,5A, 250 V AC
	: 7A , 125 V AC (USA, CDN)
Contacts of the connection	: phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: VDE, ÖVE, CEBEC, KEMA, S, D, N, FI, SEV, LCIE, IMQ, SAA, UL, CSA

TESTING

Electrical testing	: 100%
Visual inspection	: 100%
High pot test wire to wire	: 3 kv for 2 sec.
Continuity test	: 25A to grounding / 20A to line and neutral
Skin high pot test	: 6kv line to skin

Tolerances not indicated in the drawing: +/- 2 %
design subject to change without prior notice

DATE of ISSUE:	March, 2002
REV: 2 1	ORIG: mk

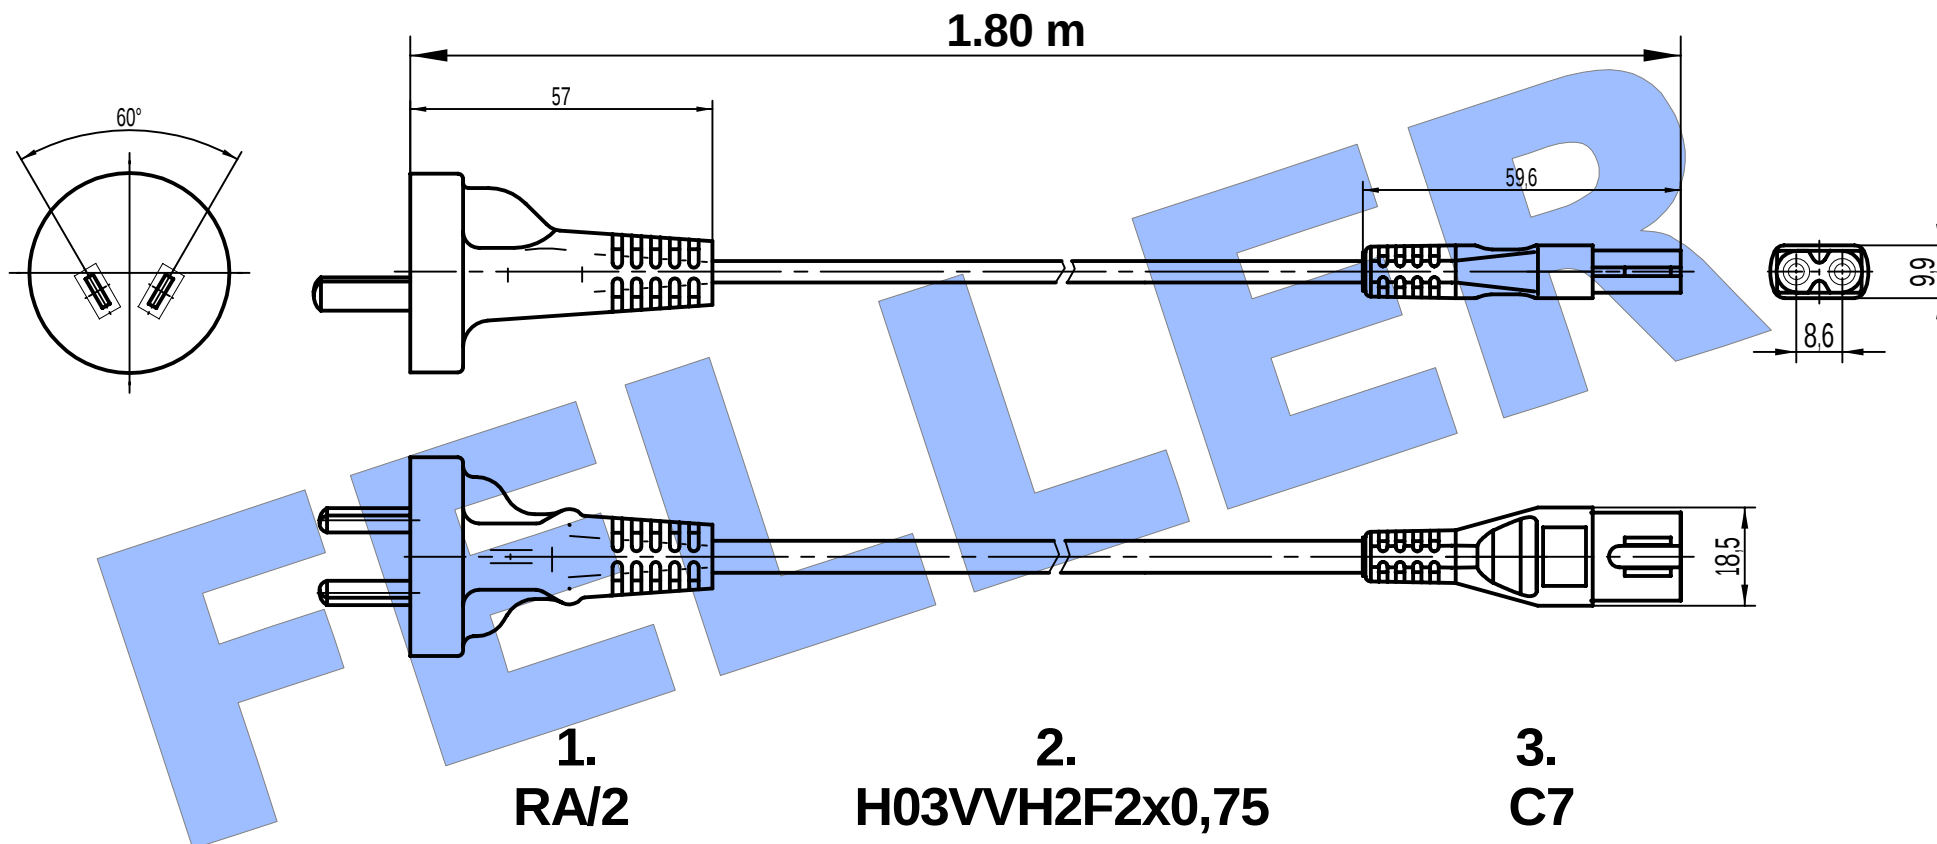

Fellertype: RA/2 - H03VVH2F2x0,75 - C7/ 1.80 m,black

26.03.01

All dimensions in mm

FELLER 

A-2525 Günselsdorf, Austria

Telefon 0043-2256-62325-0

Fax:0043-2256-62325-7

email: sales@feller-at.com

<http://www.feller-at.com>