**1. PLUG : Type 498G**

Molded plug according to	: NEMA 5-15
Rated current and voltage	: 15A, 125 V AC
Plug base	: PA6.6 GF
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: grounding O.D. 4,8mm line and neutral 6,20mm x 1,40mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: UL, CSA
SCIP Database	: d790a47a-25a5-40e1-95bc-2017a434eeb9

2. CORD : Type SJT3x16AWGWB105CVW1 BLACK

Flexible cord according to	: UL62, CSA 22.2 N° 49
Marked	: *JF*UL*E41542*SJT*3x16AWG* (1,31mm2)*105C*300V*VW-1-CSA
Number of cores	: 3
Conductor construction	: 26x0,25 mm O.D. 1,47 mm
Conductor insulation	: Extruded PVC O.D. 3,20 mm +/-0,05 mm
Jacket	: Extruded PVC O.D. 8,60 mm +/- 0,30 mm
Temperature resistance	: +105°C
Flammability resistance	: VW-1
Resistance of conductors	: 14,06 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: >0,010 MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: UL, CSA

3. CONNECTOR : Type C15M

Molded connector according to	: UL817, EN/IEC60320/C13
Rated current and voltage	: 13A, 125 Vac (USA, CANADA)
Construction	: double insulation
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: housing, PBTP GFR
Maxi. Pin temperature	: 120°C
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, UL, CSA

ENVIRONMENTAL CONFORMITY

EU-Directive 2002/96/EU (WEEE)

EU-Directive 2011/65/EU

EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%

Visual inspection : 100%


Polarity test : yes

High pot test wire to wire : 3kVac for 2 sec

Continuity test : 25Aac to grounding / 20Aac to line and neutral

Skin high pot test : 6kVac line to skin

COMAREL

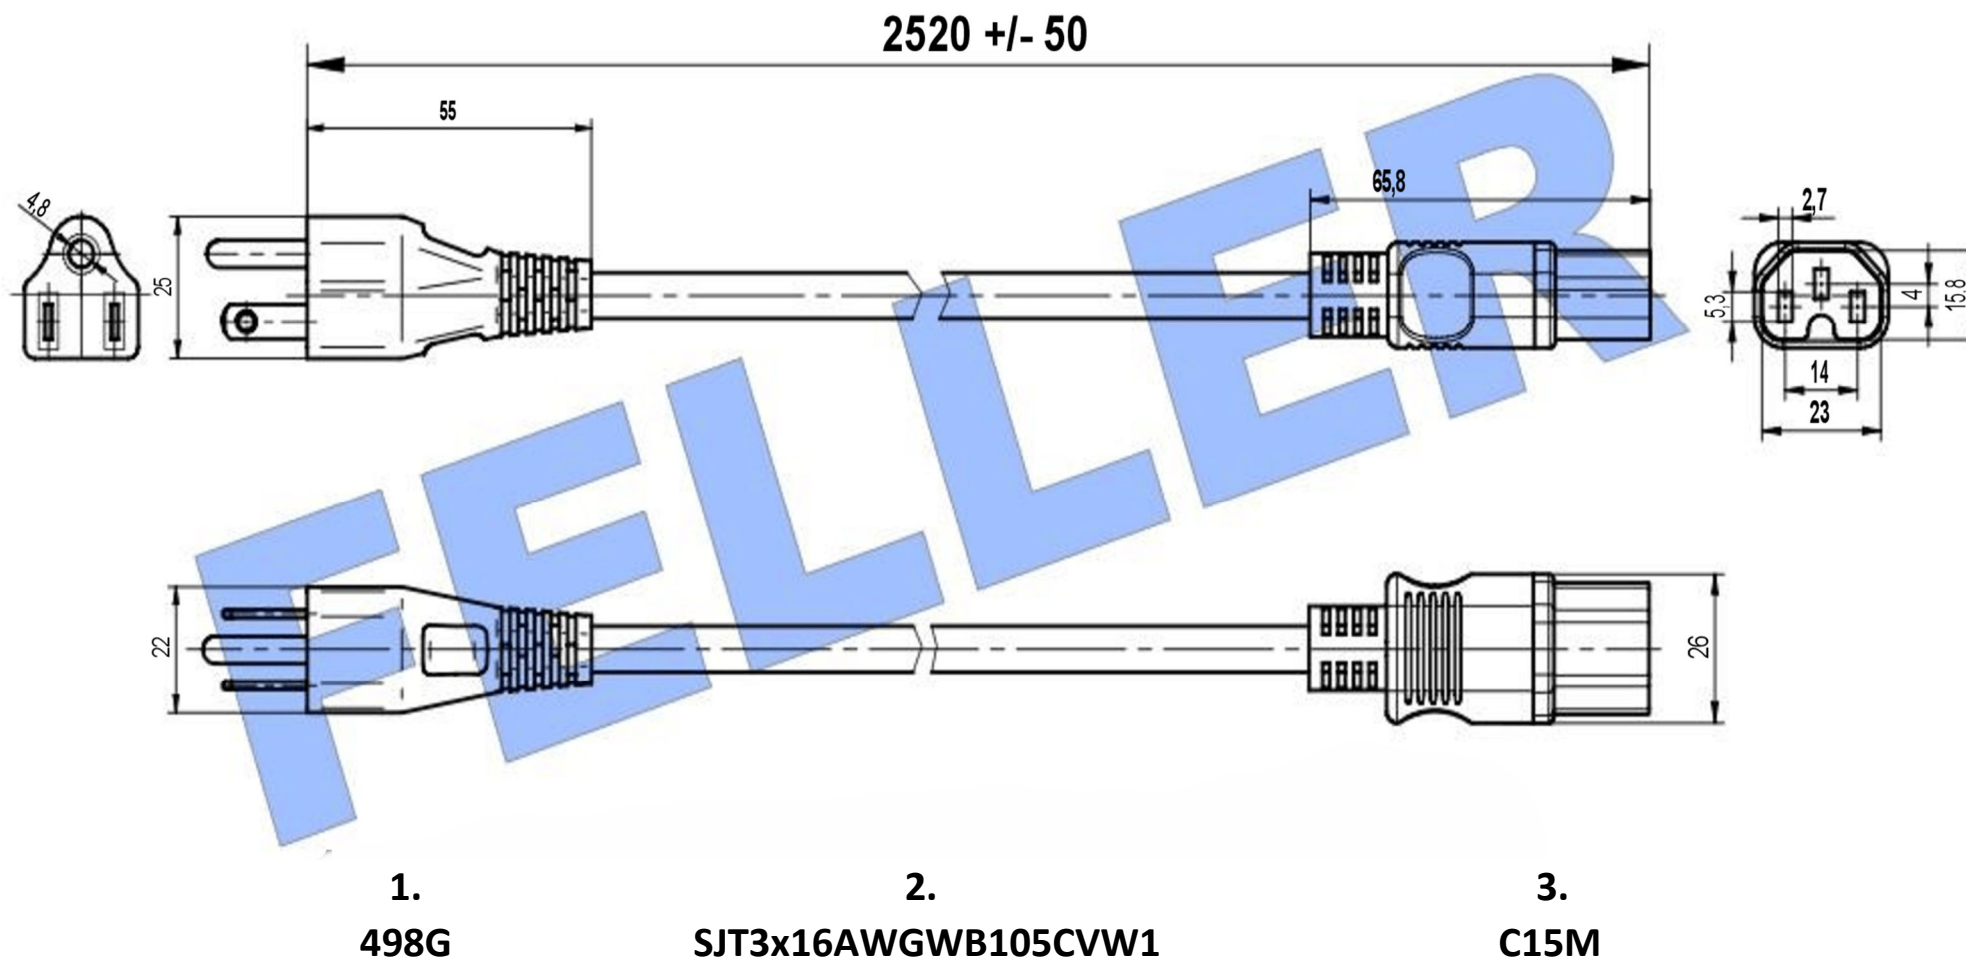

Feller Type : 498G - SJT3x16AWGWB105CVW1 - C15M / 2,50m Black

(L104)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z