**1. PLUG : Type 12G+1309**

Molded plug according to	: SN 441011-2-2021
Rated current and voltage	: 10A, 250 V AC
Plug base	: thermoplastic Polyester (PBTP) GFR
Pins	: brass, part-insulated, nickel-plated, crimped
Pins outer diameter	: 4,0 mm
Mechanical fixation	: Iron wire ZN plated D1,00
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: SEV
SCIP Database	: b8d39884-eea9-405c-bfd9-5eee85e58a7f

2. CORD : Type H05RRF3G1,00**BLACK**

Flexible cord according to	: HD22 and OVE K40
Marked	: *manufacturer*testhouse*<HAR>H05RRF3G
Number of cores	: 3
Conductor construction	: 32x0,20 mm O.D. 1,30mm
Conductor insulation	: Rubber, O.D. 2,40mm +/-0,05mm
Jacket	: Rubber, O.D. 7,20mm +/- 0,30mm
Resistance of conductors	: max. 20 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: HARMONIZED

3. CONNECTOR : Type C15M+1309

Molded connector according to	: EN/IEC60320/C15
Rated current and voltage	: 10 A, 250 V
Construction	: double insulation
Contacts of the connection	: self-adjusting phosphor bronze CuSn6, crimped
Inner insulation	: housing, PBTP GFR
Max. pin temperature	: 120°C
Mechanical fixation	: iron wire ZN plated D1,00
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC


ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

COMAREL

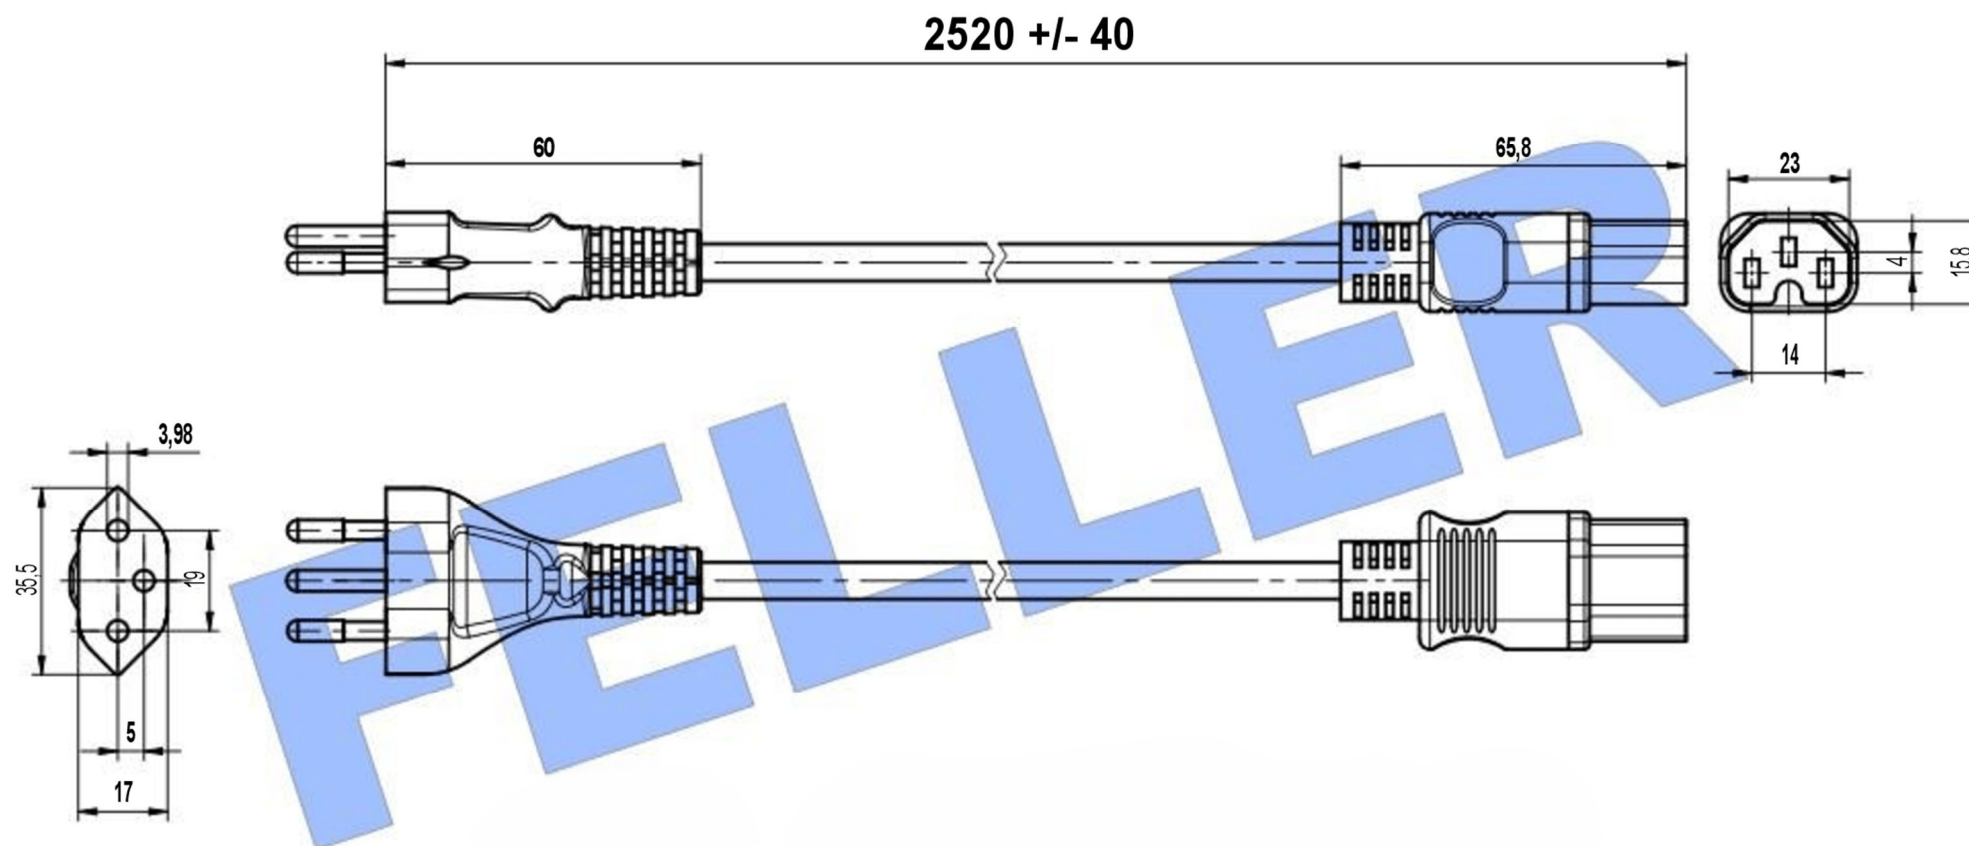

1.
12G+1309

2.
H05RRF3x1,00

3.
C13M+1309

Feller Type : 12G+1309 - H05RRF3G1,00 - C13M+1309 / 2,50m Black

(L107)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z