

**PLUG : Type 498GJTW**

Molded plug according to	: NEMA 5-15, JIS C 8303, CNS690
Rated current and voltage	: 15 A, 125 V AC
Plug base	: PA 6.6 GF
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: grounding O.D. 4,8 mm line and neutral 6,20mm x 1,40 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: UL, CSA, PSE-Mark (JET), BSMI
SCIP Database	: d790a47a-25a5-40e1-95bc-2017a434eeb9

CORD : CNS SJT HVCTF3x2,00mm² (14AWG)**BLACK**

Flexible cord according to	: UL62, CSA 22.2 N°49, CNS 3199, JISC 3306*
Marked	BSMI MARK* R31947*RoHS*JF*HVCTF-3x2,00mm ² (37/0.26) *Production year*--* <PS>E*JET*JF* HVCTF*3x2.00mm ² *JF*UL * E41542*SJT*3x14AWG*(2.08mm ²)*105C*300V-VW-1*CSA
Number of cores	: 3
Conductor construction	: 37x0,26 mm
Conductor insulation	: Extruded PVC O.D. 3,00mm +/-0,10mm
Jacket	: Extruded PVC O.D.8,50mm +/- 0,30mm
Temperature rating	: BSMI -20°C to +75°C PSE (JET) -20°C to +90°C
Resistance of conductors	: max. 9,75 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,005MΩ/km
Color of conductors	: green, black, white
Approvals	: UL, CSA, BSMI, PSE Mark (JET)

CONNECTOR : Type C19

Molded connector according to	: EN/IEC60320/C13, UL817, GB17465.1
Rated current and voltage	: 15 A, 125 Vac
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: Housing, PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, UL, CSA, PSE-Mark (JET), BSMI

ENVIRONMENTAL CONFORMITY


EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	kin high pot test : 6kVac line to skin

Design subject to change without prior notice

February 2025/ Rev 0/ JMPr

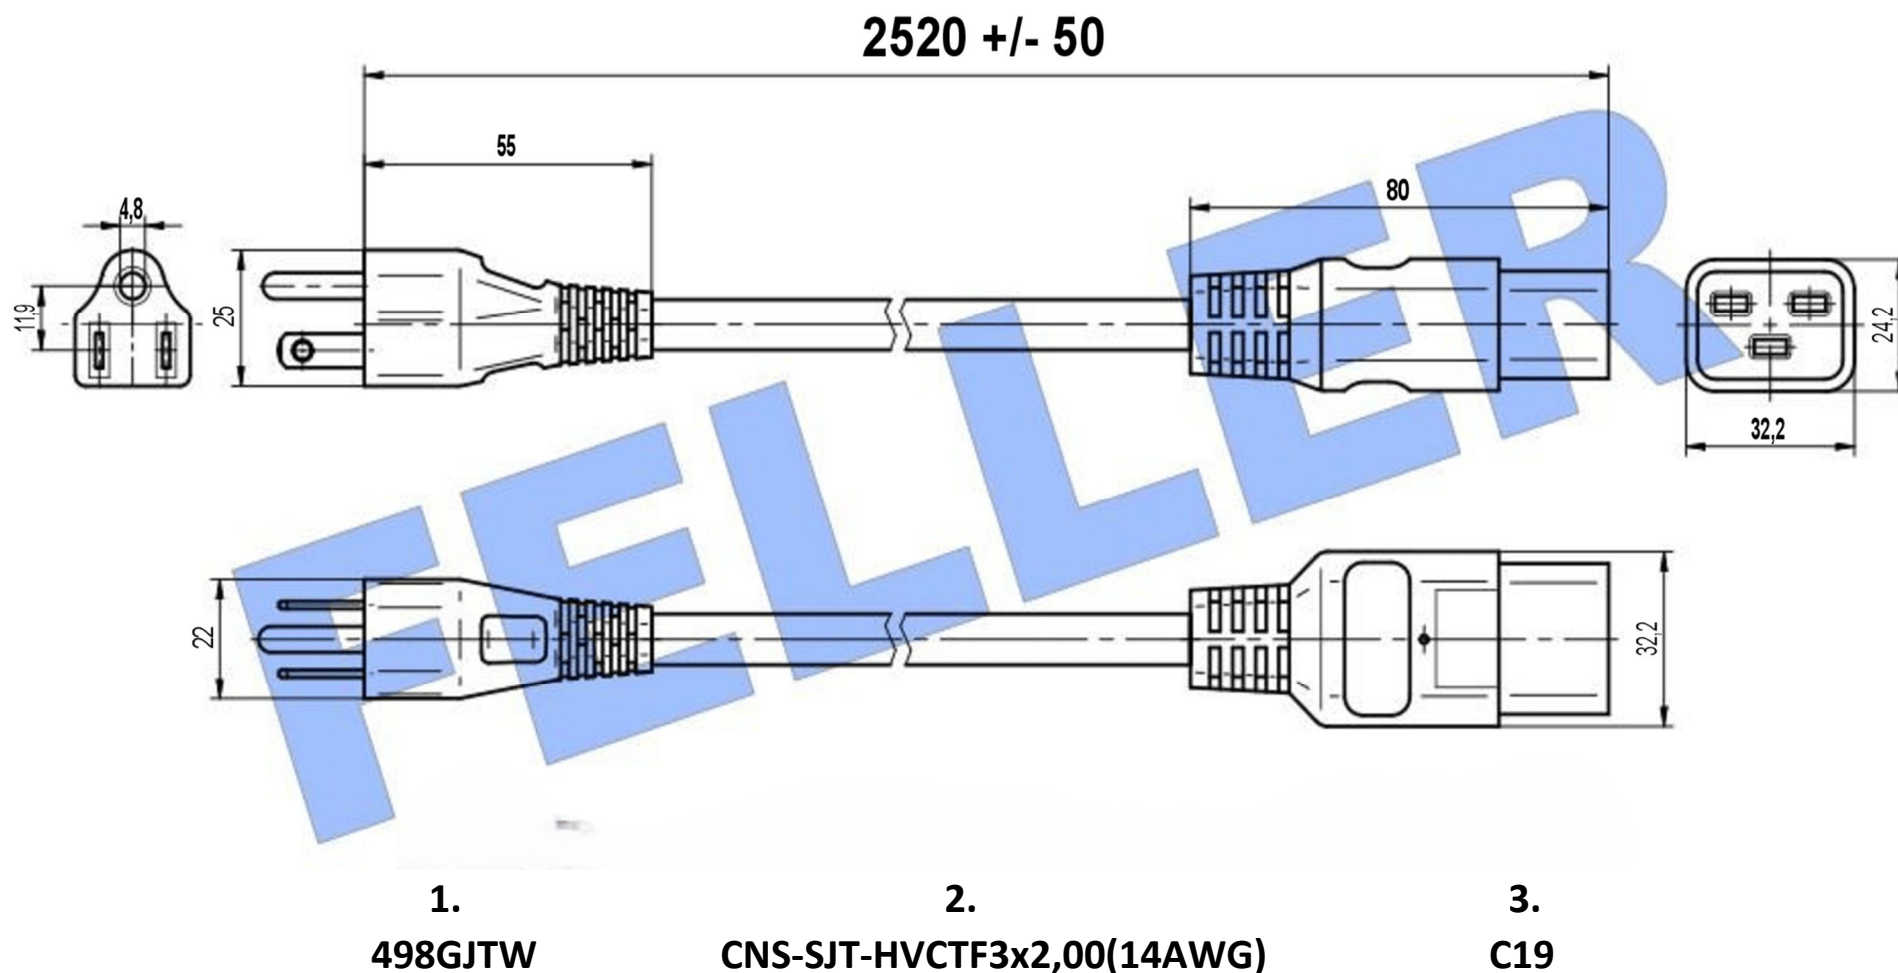

Feller Type : 498GJTW - CNS-SJT-HVCTF3x2,00(14AWG) - C19 / 2,50m Black

(L110)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z