

**1. PLUG : Type VIIG**

Molded plug according to	: IEC60884, CEE (7) VII, KSC8305
Rated current and voltage	: 16A, 250 V AC
Plug base	: thermoplastic Polyester (PBTP) 30% GF
Construction	: double insulated
Pins	: brass, nickel-plated, crimped
Pins outer diameter	: 4,8 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: VDE, ÖVE, CEBEC, KEMA, S-INTERTEK, D, N, FI, NF, IMQ, EAC, KTL, SNI
SCIP Database	: 60f3ed1-0a06-4272-8901-d04d26aec79

2. CORD : Type H05VVF3G1,50mm²**BLACK**

Flexible cord according to	: EN 50525-1, EN 50525-2-1, EN 50395, EN 50396, AS3191
Marked	: *JF*< ÖVE><HAR>H05VVF3G1,50mm ² *N1095*CE*CCC 60227
	IEC 53(RVV) 300/500V 3X1,50mm ² *KTL SW01001-2001*SNI
	MARK* SNI 04-6629.5 Cu/PVC/PVC-f
Number of cores	: 3
Conductor construction	: 29x0,45 mm O.D. 1,52mm
Conductor insulation	: Extruded PVC O.D. 2,90mm +/-0,06mm
Jacket	: Extruded PVC O.D. 8,20mm +/- 0,20mm
Temperature rating	: -20°C up to +70°C
Resistance of conductors	: max. 13,3 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: <HAR>, SAA, ÖVE, CCC, KTL, SNI

3. 2nd end : Type G25

25mm jacket removed


ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

COMAREL

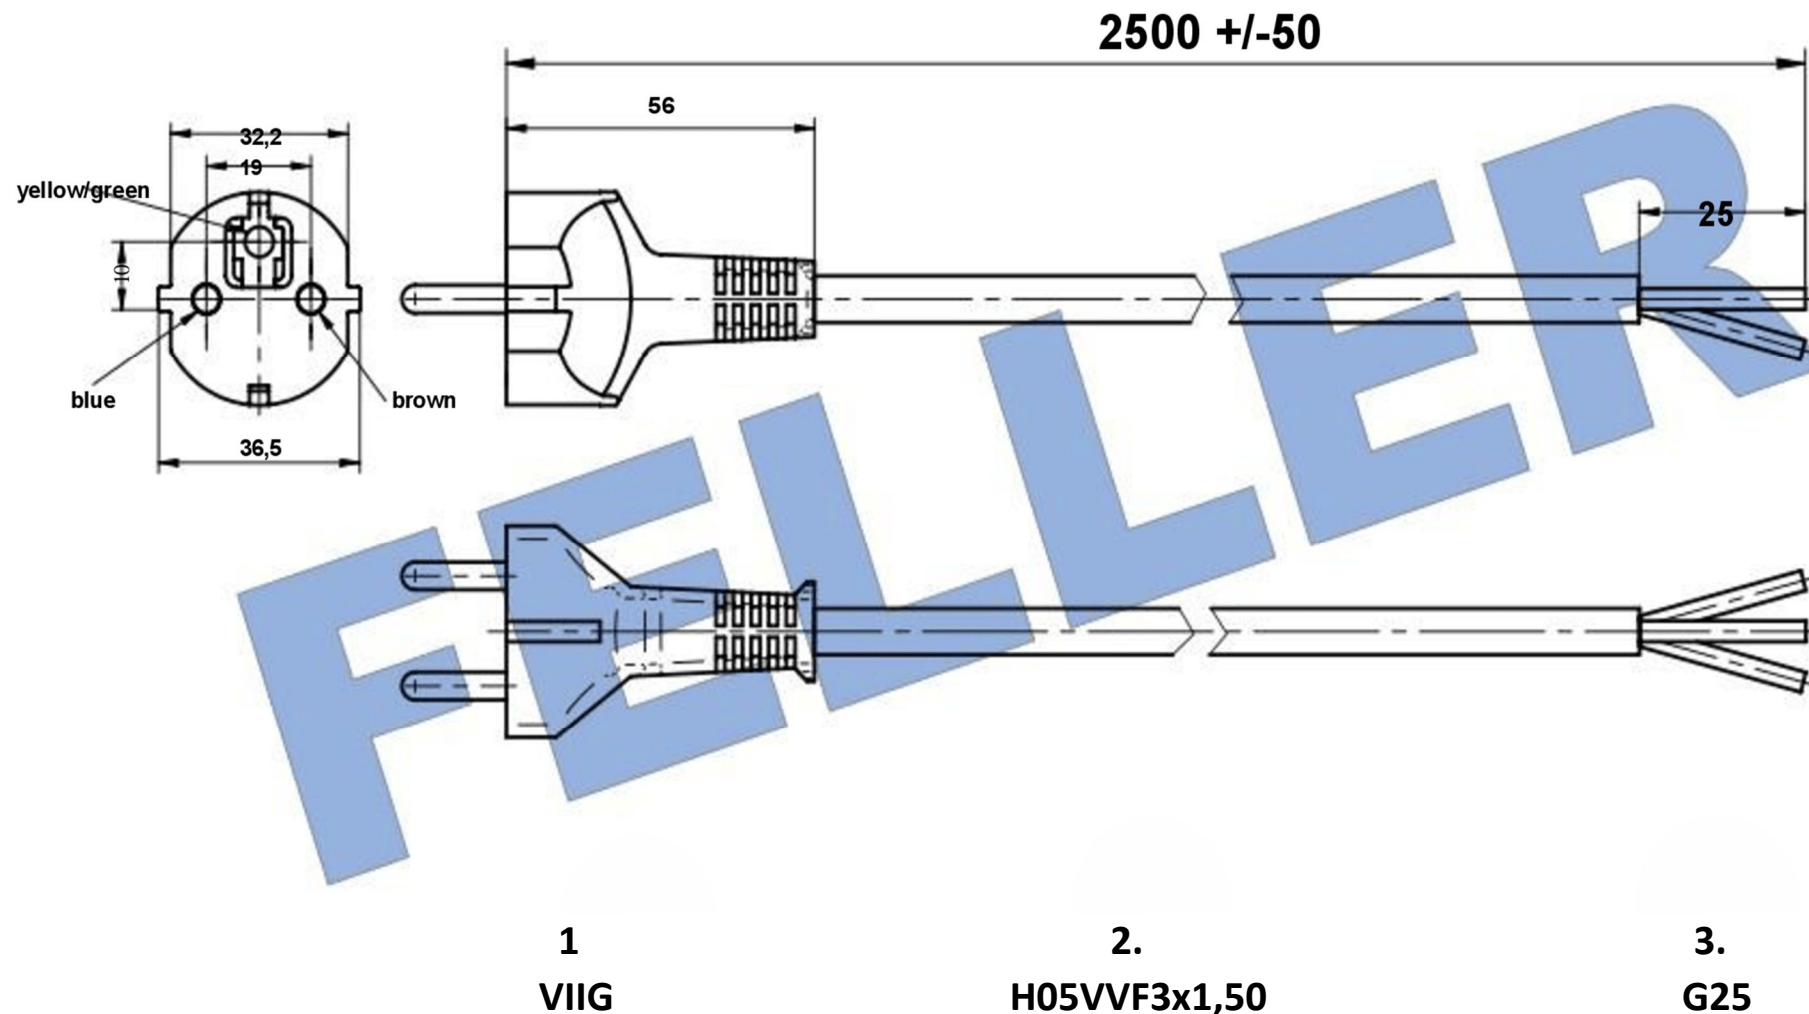

Feller Type : VIIG - H05VVF3G1,50 - G25 / 2,50m Black

(L29)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z