**PLUG : XVI**

Molded plug according to	: EN50075
Rated current and voltage	: 2,5A, 250 V AC
Plug base	: PA GFR
Construction	: double insulation, contacts crimped
Pins	: brass, nickel-plated, parts-sleeved
Pins outer diameter	: 4,0 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: ENEC
SCIP Database (Feller)	: d1e45c90-9d29-4e67-9439-0fe7da594589

CORD : Type H05VVH2F2x0,75 mm2**BLACK SW9005**

Flexible cord according to	: EN50525-1, EN50525-2-11, EN50395, EN50396, AS3191
Marked	: *JF*<OVE><HAR>H05VVH2F2x0,75*N1095*N1095*CE*CCC 227 IEC53 (RVV) 300/500V 2x0,75mm2
Number of cores	: 2
Conductor construction	: 23x0,20 mm O.D. 1,10 mm
Conductor insulation	: Extruded PVC O.D. 2,30 mm +/-0,05 mm
Jacket	: Extruded PVC O.D. 3,95x6,25 mm +/- 0,20 mm
Resistance of conductors	: max. 26 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: >0,010 MΩ/km
Color of conductors	: brown, blue
Approvals	: HARMONIZED, OVE, SAA

CONNECTOR : Type C7

Molded connector according to	: EN/IEC60320/C7, AS 3109.1
Rated current and voltage	: 2,5A , 250 VAC
Construction	: double insulation
Contacts of the connection	: phosphor bronze CuSn6, crimped
inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC, SAA




ENVIRONMENTAL CONFORMITY

EU-Directive 2002/96/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Skin high pot test : 6kVac line to skin
Polarity test : yes	

1810 +/- 35

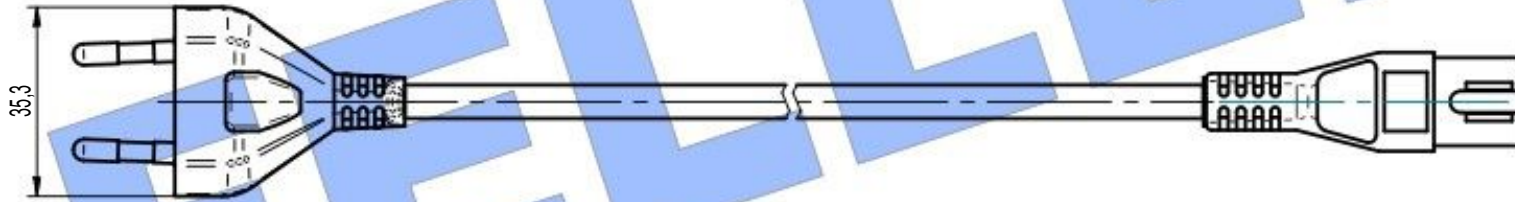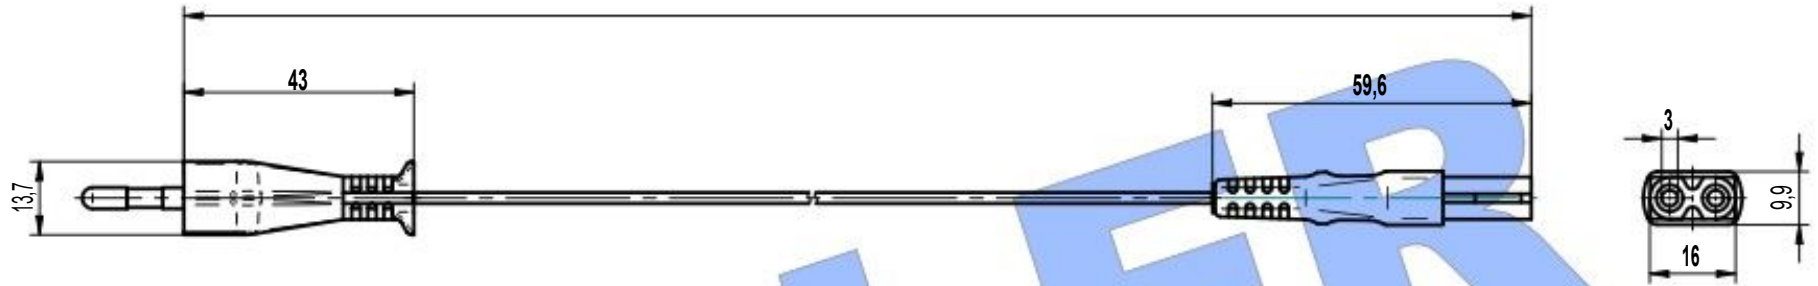

1.
XVI

2.
H05VVH2F2x0,75

3.
C7

Type : (L342) XVI-H05VVH2F2X075-C7/1,80m Black

All dimensions in mm
RoHS compliant

COMAREL 

Tel : '33) 1 34 13 72 80
mail : info@comarel.fr
site : www.comarel.fr