



1. **PLUG** : Type XVI

Molded plug according to	: EN50075
Rated current and voltage	: 2,5A, 250 V AC
Plug base	: PA GFR
Construction	: double insulation, contacts crimped
Pins	: brass, nickel-plated, parts-sleeved
Pins outer diameter	: 4,0 mm
Outer mold	: PVC ,compound, hardness Shore A75-77
Approvals	: ENEC, EAC
SCIP database	: d1e45c90-9d29-4e67-9439-0fe7da59489 V1 2020.11.19

2. **CORD** : Type H03VVH2F2x0,75 mm2

BLACK SW9005

Flexible cord according to	: OVE K41a, HD 21.S2, AS3191
Marked	: *JF*<OVE><HAR>H03VVH2F2x0,75*N1095*CE
Number of cores	: 2
Conductor construction	: 23x0,20 mm O.D. 1,10 mm
Conductor insulation	: Extruded PVC O.D. 2,10 mm +/-0,05 mm
Jacket	: Extruded PVC O.D. 3,30x5,40 mm +/- 0,20 mm
Resistance of conductors	: max. 22,37 Ω /km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: >0,010 M Ω /km
Color of conductors	: brown, blue
Approvals	: <HAR>, OVE

3. **CONNECTOR** : Type C7

Molded connector according to	: EN/IEC60320/C7
Rated current and voltage	: 2,5A , 250 VAC
Construction	: double insulation
Contacts of the connection	: phosphor bronze CuSn6, crimped
inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC


ENVIRONMENTAL CONFORMITY

EU-Directive 2002/96/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Skin high pot test : 6kVac line to skin
Polarity test : yes	

COMAREL

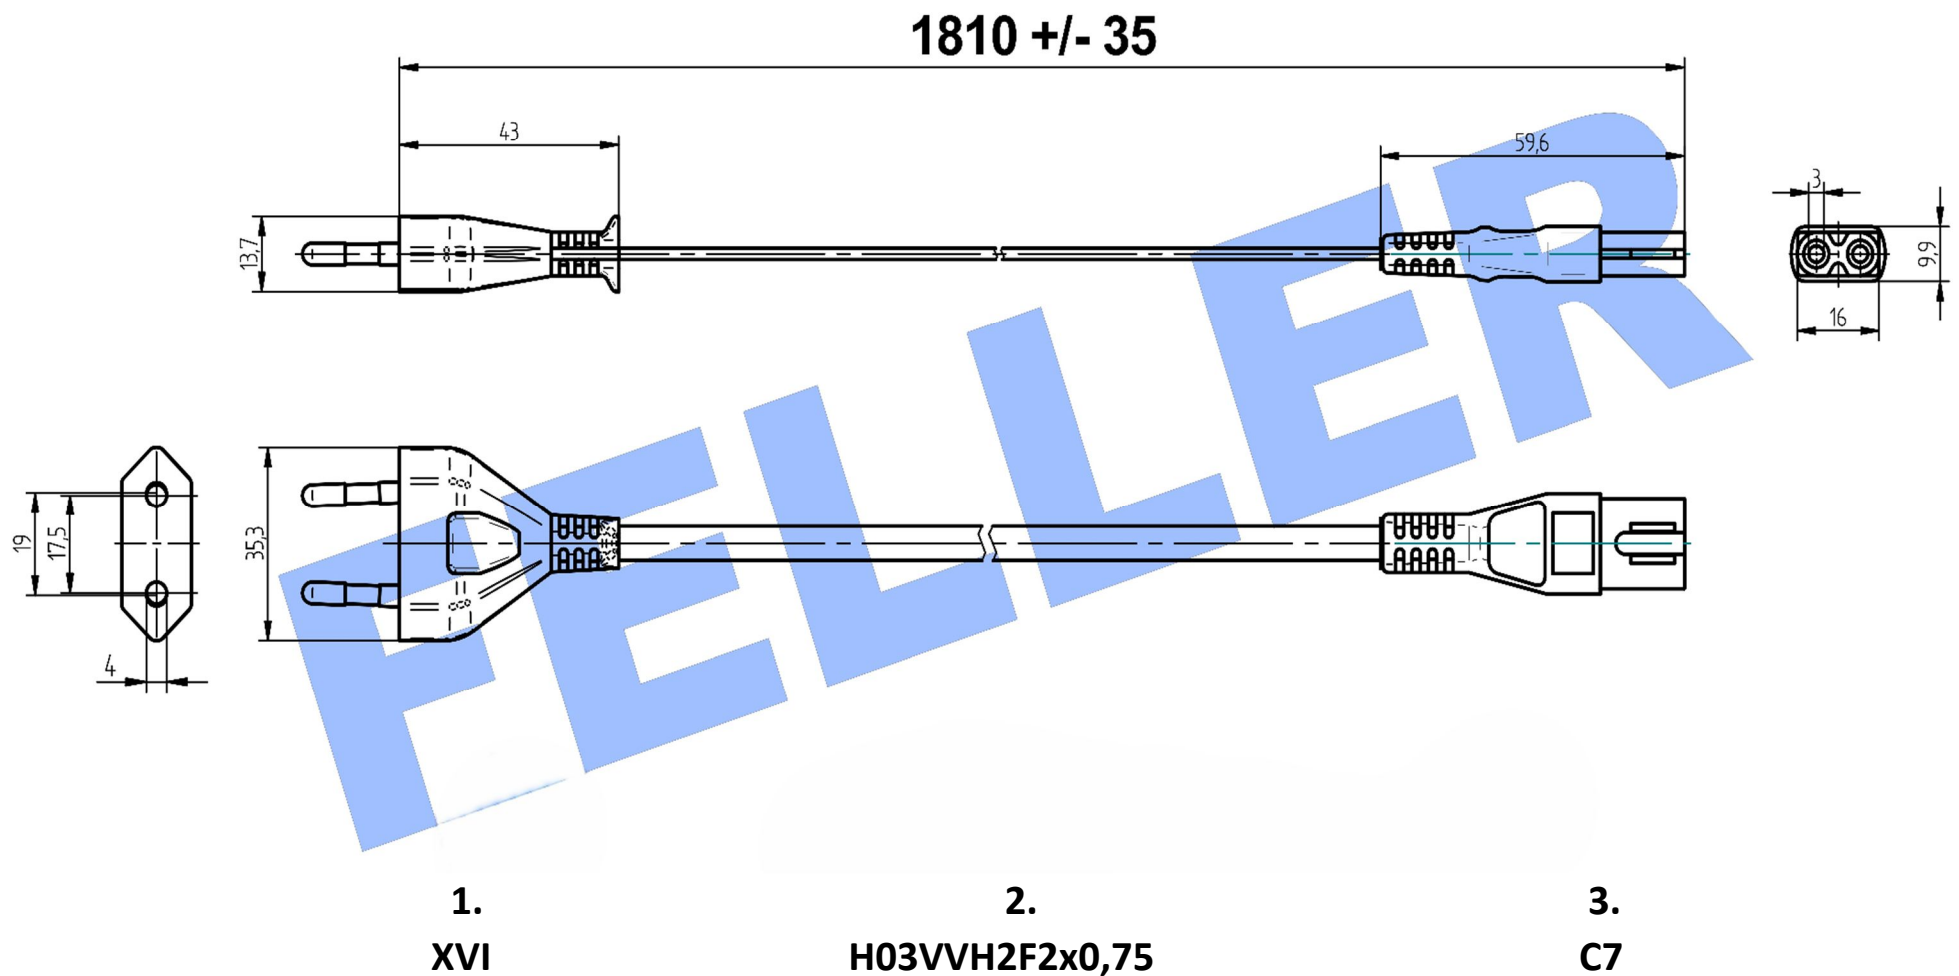

Feller Type : XVI - H03VVH2F2x0,75 - C7 / 1,80m Black

(L36)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z