**PLUG : Type HG/TR**

(Transparent)

Molded plug according to	: NEMA 5-15 (Hospital Grade)
Color plug	: Transparent
Front side marking	: green dot
Rated current and voltage	: 15A, 125 V AC
Plug base	: Thermoplastic Polyester (PBTP) GFR
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: grounding O.D. 4,80 mm line & neutral 6,20 mm x 1,40 mm
Outer mold	: PVC compound, hardness Shore A89 +/- 3
Approvals	: UL, CSA
SCIP Database	: d790a47a-25a5-40e1-95bc-2017a434eeb9

CORD : Type SJT3x16AWG**BLACK**

Flexible cord according to	: UL62, CSA 22.2 N°49
Marked	: *JF*UL*E41542*SJT*3x16AWG- (1.31mm ²)*60c*300V*FT2*CSA
Number of cores	: 3
Conductor construction	: 26x0,25 mm O.D. 1,47mm
Conductor insulation	: Extruded PVC , O.D. 3,20mm +/-0,05mm
Jacket	: Extruded PVC, O.D. 8,60mm +/- 0,30mm
Temperature rating	: -20°C up to +60°C
Flammability rating	: UL 94 FT2
Resistance of conductors	: max. 14,06 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 2,5 MΩ/km
Color of conductors	: green, black, white
Approvals	: UL, CSA

CONNECTOR : Type C13M

Molded connector according to	: UL817, C22.2N°.21, EN/IEC60320/C13
Rated current and voltage	: 13A, 250 Vac (USA-Canada)
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, UL, CSA,

ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH -compliant)
 High pot test wire to wire: 3kVac for 2 sec
 Continuity : 25Aac to grounding /20Aac to line and neutral
 Skin high pot test : 6kVac line to skin


TESTING

Electrical testing : 100%
 Visual inspection : 100%
 Polarity test : yes

design subject to change without prior notice

February 2025 / Rev 0 / jmp

COMAREL

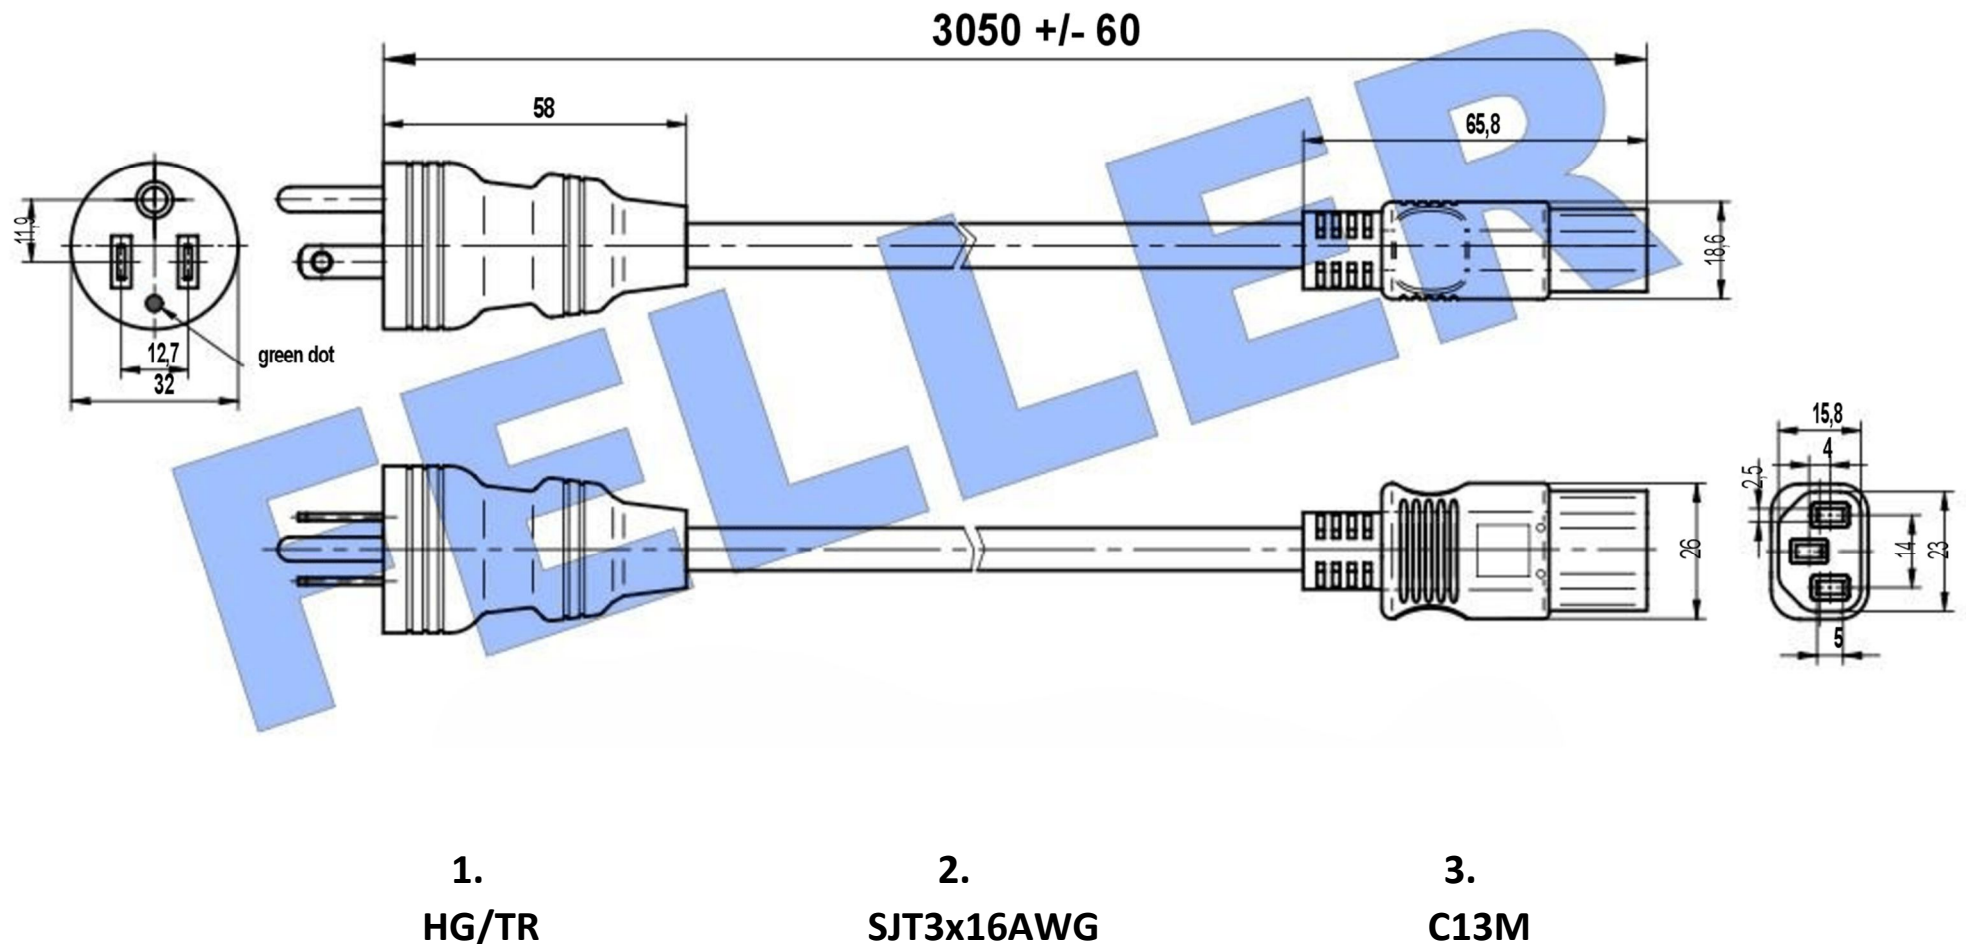

Feller Type : HG/TR - SJT3x16AWG - C13M / 3,05m Black

(L71B)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z