

**1. PLUG : Type C14G**

Interconnection coupler according to	: EN/IEC 60320-2-2/E, UL817, c22.2n°21, JIS C8303, GB17465.1, K60320-2-2/E
Rated current and voltage	: 10A, 250 V AC
Plug base	: PPO GFR
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: 4,00 mm x 2,00 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: CE, ENEC, SAA, UL, CSA, PSE(JET), CCC, KTL
SCIP database	: f11f2d33-0014-4c1e-afbc-cfccbf97c1c V1 2020.11.19

2. CORD : Type HARSJT3x17(1,0)AWG**BLACK**

Flexible cord according to	: UL62, CSA 22.2 N°49, OVEK41a, HD21. S3:1994/A2:2001, AS3191, GB5023, JIS C3306, IEC 60227
Marked	: *JF*<O VE><HAR>H05VVF3G1,0mm2*CE*N1095*UL*E41542*SJT*3x17AWG* (1,04mm2)*75C*300V*FT2*CSA*CCC*A014300*60227 IEC53 (RVV) 300/500V 3x1,0MM2*<PS> E *JET*HVCTF*75C
Number of cores	: 3
Conductor construction	: 32x0,20 mm O.D. 1,30mm
Conductor insulation	: Extruded PVC O.D. 2,85mm +/-0,05mm
Jacket	: Extruded PVC O.D. 7,80mm +/- 0,20mm
Temperature rating	: HAR-20°C up to +70°C/UL -20°C up to +75°C/PSE up to 75°C
Resistance of conductors	: max. 17,8 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: <HAR>, ÖVE, SAA, UL, CSA, CCC, PSE (JET), KTL

3. CONNECTOR : Type C13

Molded connector according to	: EN/IEC60320/C13, UL817, C22.2N°.21, GB17465.1, JIS C8303
Rated current and voltage	: 7A, 125 VAC (JAPAN) : 10A, 250 VAC : 12A, 250 VAC (USA - CANADA)
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC, SAA, UL, CSA, CCC, PSE (JET), SII, KTL


ENVIRONNEMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH-compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity test : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

COMAREL

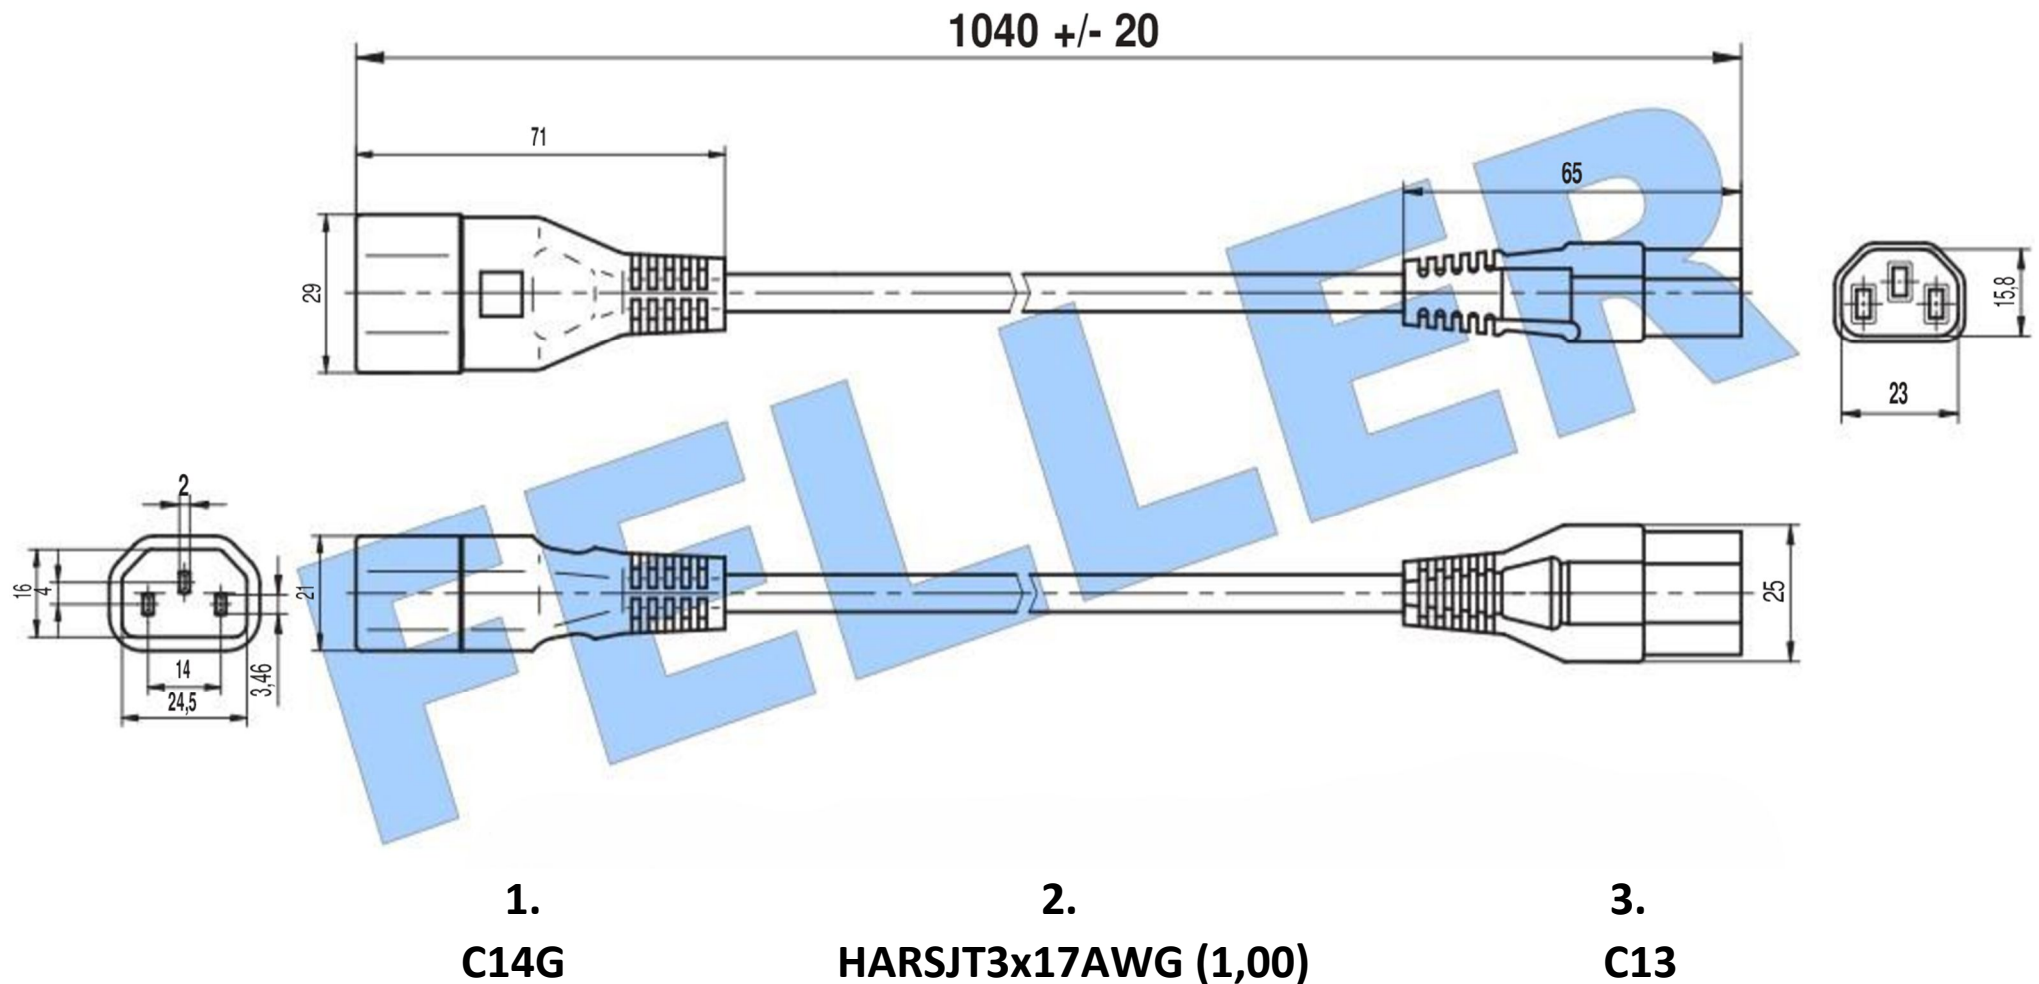

Feller Type : C14G - HARSJT3x17AWG(1,00) - C13 / 1,00m Black

(L82)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z