



1. **PLUG** : Type PRC/3

| | |
|---------------------------|---------------------------------------|
| Molded plug according to | : GB2099, GB 1002 |
| Rated current and voltage | : 10A, 250 V AC |
| Plug base | : PPO GFR |
| Pins | : solid brass, nickel-plated, crimped |
| Pins dimension | : 6,40 mm x 1.50 mm |
| Outer mold | : PVC compound, hardness Shore A75-77 |
| Approvals | : CCC |

2. **CORD** : Type H05VVF3G1,00mm² **BLACK SW9005**

| | |
|----------------------------|---|
| Flexible cord according to | : EN 50525-1, EN 50525-2-11, EN 50395, EN 50396, AS 3191 |
| Marked | : *JF* < ÖVE > < HAR > H05VVF3G1,0mm ² *N1095*CE*CCC 60227 IEC 53(RVV) 300/500V 3X1,00mm ² *KTL SW01001-2001*SNI MARK* |
| Number of cores | : 3 |
| Conductor construction | : 31x0,20 mm O.D. 1,25mm |
| Conductor insulation | : Extruded PVC O.D. 2,40mm +/-0,05mm |
| Jacket | : Extruded PVC O.D. 6,80mm +/- 0,20mm |
| Temperature rating | : -20°C up to +70°C |
| Resistance of conductors | : max. 19,5 Ω/km |
| Dielectric strength | : 2kVac, 1min |
| Insulation resistance | : > 0,010MΩ/km |
| Color of conductors | : yellow/green, brown, blue |
| Approvals | : HARMONIZED, CCC, SAA, ÖVE, KTL, SNI |

3. **CONNECTOR** : Type C13


| | |
|-------------------------------|--|
| Molded connector according to | : EN/IEC60320/C13, K60320-1 |
| Rated current and voltage | : 10 A, 250 V |
| Construction | : double insulation, contacts crimped |
| Contacts of the connection | : self-adjusting phosphor bronze CuSn6 |
| Inner insulation | : PPO GFR |
| Outer mold | : PVC compound, hardness Shore A 75-77 |
| Approvals | : CE, CCC, ENEC, EAC, KTL |

ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

| | |
|---------------------------|--|
| Electrical testing : 100% | High pot test wire to wire: 3kVac for 2 sec |
| Visual inspection : 100% | Continuity : 25Aac to grounding /20Aac to line and neutral |
| Polarity test : yes | Skin high pot test : 6kVac line to skin |

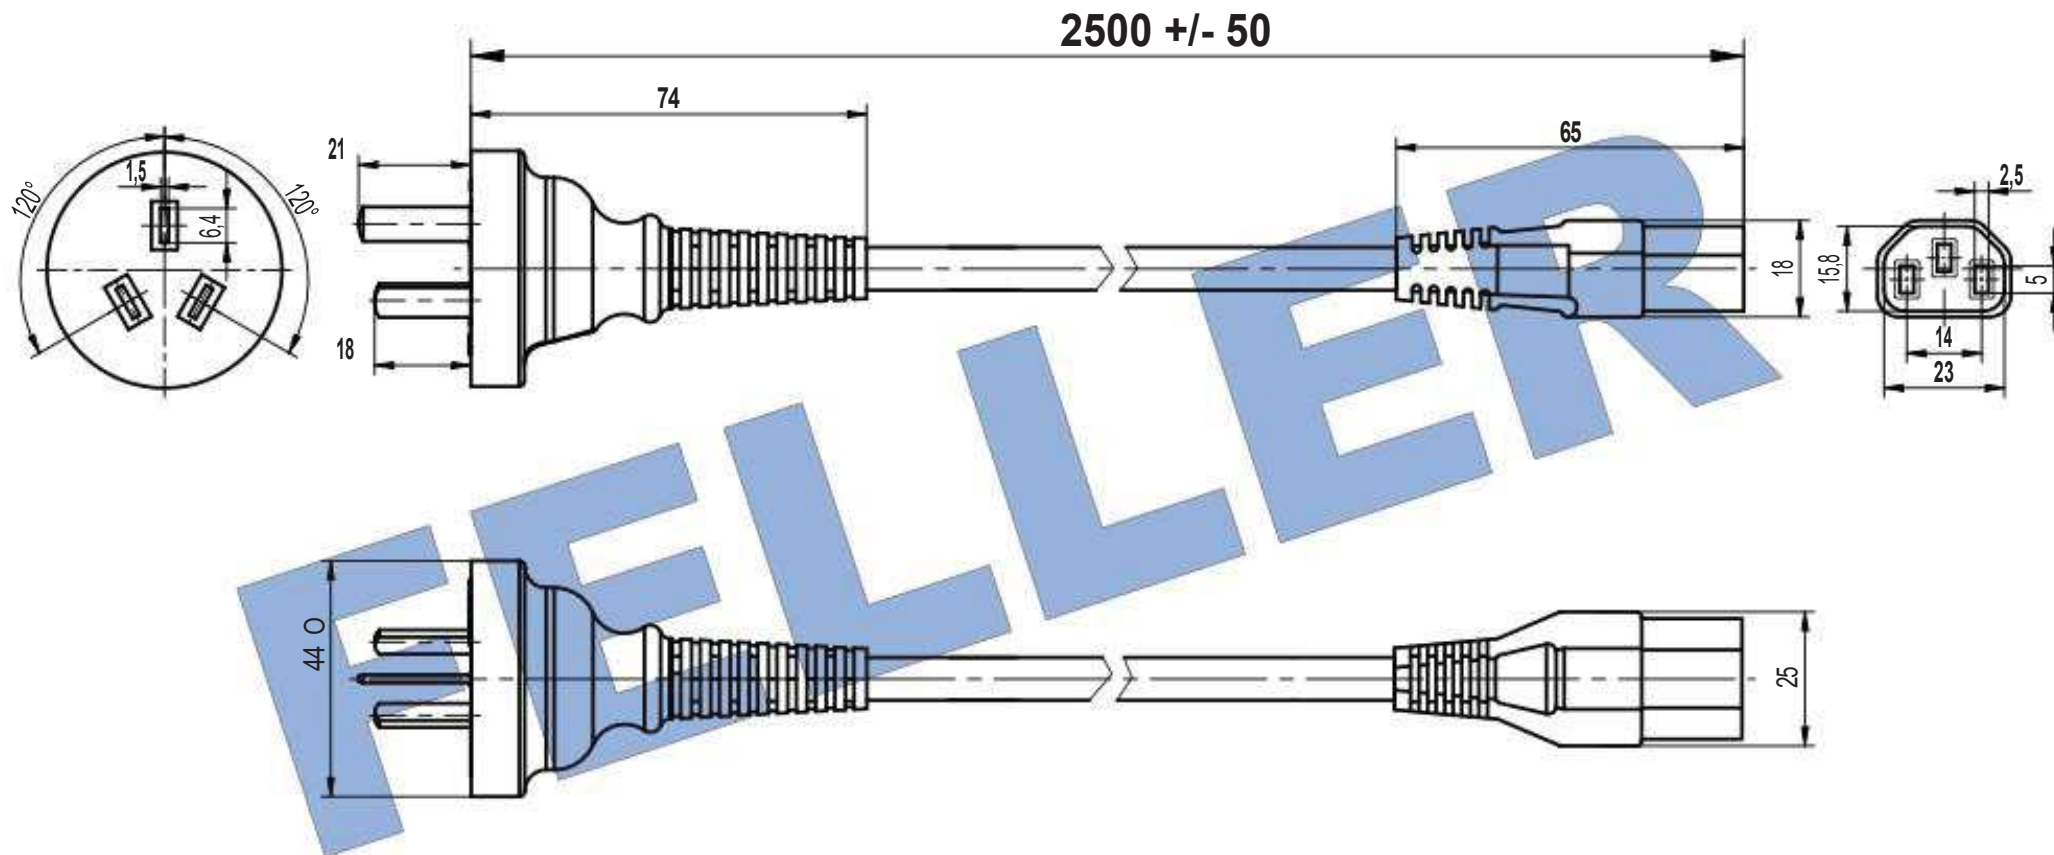

1.
PRC/3

2.
H05VVF3G1,00

3.
C13

Type: (L86) PRC/3-H05VVF3G100-C13/2,50m Black



RoHS compliant



AR

All dimensions in mm

COMAREL 

Tel : (33) 2 34 13 72 80
 mail : info@comarel.fr
 site : www.comarel.fr