

1. PLUG : VIIG + 1309

Molded plug according to	: CEE (7) VII, IEC60884
Rated current and voltage	: 16A, 250 V AC
Plug base	: Thermoplastic Polyester (PBTP) GFR
Construction	: double insulated
Pins	: solid brass, nickel-plated, crimped
Pins outer diameter	: 4,8 mm
Mechanical fixation	: iron wire ZN plated D1, 00
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: VDE, OVE, CEBEC, KEMA, S , D, N, FI, LCIE, IMQ, IMQ, EAC, KTL
SCIP database	: 60f3e2d1-0a06-4272-8901-d04d26aecd79

2. CORD : H05RRF3G1,00mm2

BLACK

Flexible cord according to	: HD22 and OVE K40
Marked	*manufacturer*testhouse*<HAR> H05RRF3G
Number of cores	: 3
Conductor construction	: 32x0,20 mm OD 1,30 mm
Conductor insulation	: Rubber O.D. 2,40 mm
Jacket	: Rubber O.D.7,20 mm +/- 0,30 mm
Resistance of conductors	: max. 20 Ω/km
Dielectric strength	: 2 kVac, 1min
Insulation resistance	: > 0,010 M Ω/km
Color of conductors	: yellow/green, brown, blue
Approvals	: <HAR>

3. CONNECTOR : C15M+1309

Molded connector according to	: EN/IEC 60320/C15
Rated current and voltage	: 10A, 250 V AC
Construction	: double insulation,
Inner insulation	: self-adjusting phosphor bronze CuSn6, crimped
Max. pin temperature	: 120° C
Outer mold	: PVC compound, hardness Shore A 75-77
Approval	: CE, ENEC, KTL


ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
 EU-Directive 2011/65/EU
 EU-Directive 1907/2006 EG (REACH compliant)
 High pot test wire to wire : 3kVac for 2 sec
 Continuity test : 20Aac to line and neutral
 Skin high pot test : 6kVac line to skin

TESTING

Electrical testing : 100%
 Visual inspection : 100%
 Polarity test : yes

COMAREL

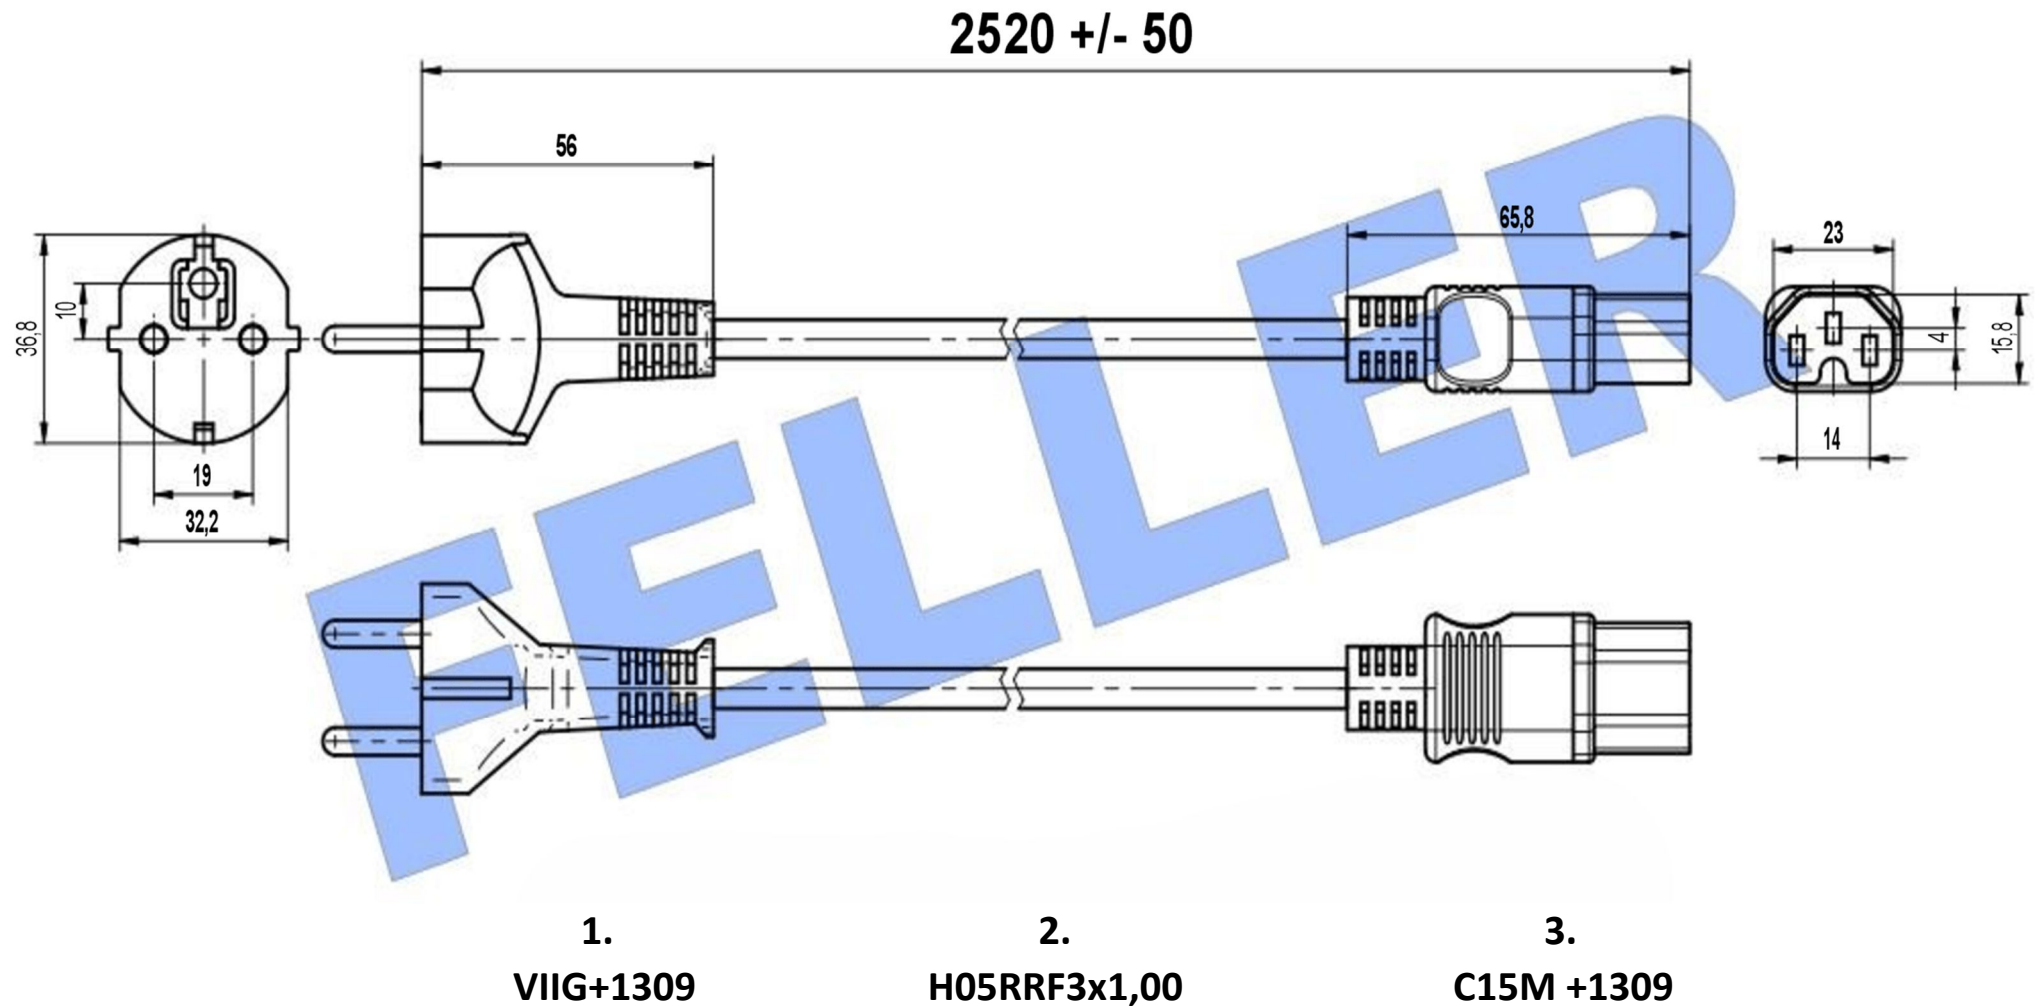

Feller Type : VIIG+1309 - H05RRF3G1,00 - C15M+1309 Black

(L90A)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z