

**1. PLUG : Type C20**

Interconnection coupler according to	: EN 60320-2-2/I, UL 817, CSA 22.2 N°21, GB 15934, K60320-1, KT60320-2
Rated current and voltage	: 16A, 250 V AC
Plug base	: PPO GFR
Pins	: solid brass, nickel-plated, crimped
Pins dimensions	: grounding 6,00 mm X 2,00 mm line and neutral 5,00 mm x 2,00 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: CE, ENEC, UL, CSA, PSE, KTL
SCPI database	: 7467a67a-5df7-40f6-8604-dfc22460b81e

2. CORD : Type HARSJT3x14(1.5)AWG

Flexible cord according to	: UL62, CSA 22.2N°49, 227 IEC53, OVE K41a, HD21.S2, JISC 3306-1987
Marked	: AS3191, GB/T 5023.5-2008/IEC 60227-5:2003, K60227-5 : *JF*< ÖVE>< HAR>H05VVF3G1,50mm2*N1095*CE*UL*E41452* SJT*3x14AWG(2,08mm2)-75C*300V*FT2*CSA*-CCC*A014300* 60227 IEC 53(RVV) 300/500V 3X1,50mm2*KTL SW1001-2001A* < PS>E*JET*HVCTF3X2,0mm2*75C
Number of cores	: 3
Conductor construction	: 41x0,25 mm O.D. 1,84mm
Conductor insulation	: Extruded PVC O.D. 3,40mm
Jacket	: Extruded PVC O.D. 9,20mm +/- 0,30mm
Temperature rating	: UL -20°C to +75°C / HAR -20°C to +70°C
Resistance of conductors	: max. 8,84 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: < HAR>, ÖVE, UL, CSA, CCC, KTL, PSE (JET)

3. CONNECTOR : Type C19

Molded connector according to	: EN/IEC60320/C19, UL817, GB17465.1
Rated current and voltage	: 16 A, 250 V
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: Housing PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC, UL, CSA, PSE, SAA, CCC, KTL


ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH -compliant)

TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

COMAREL

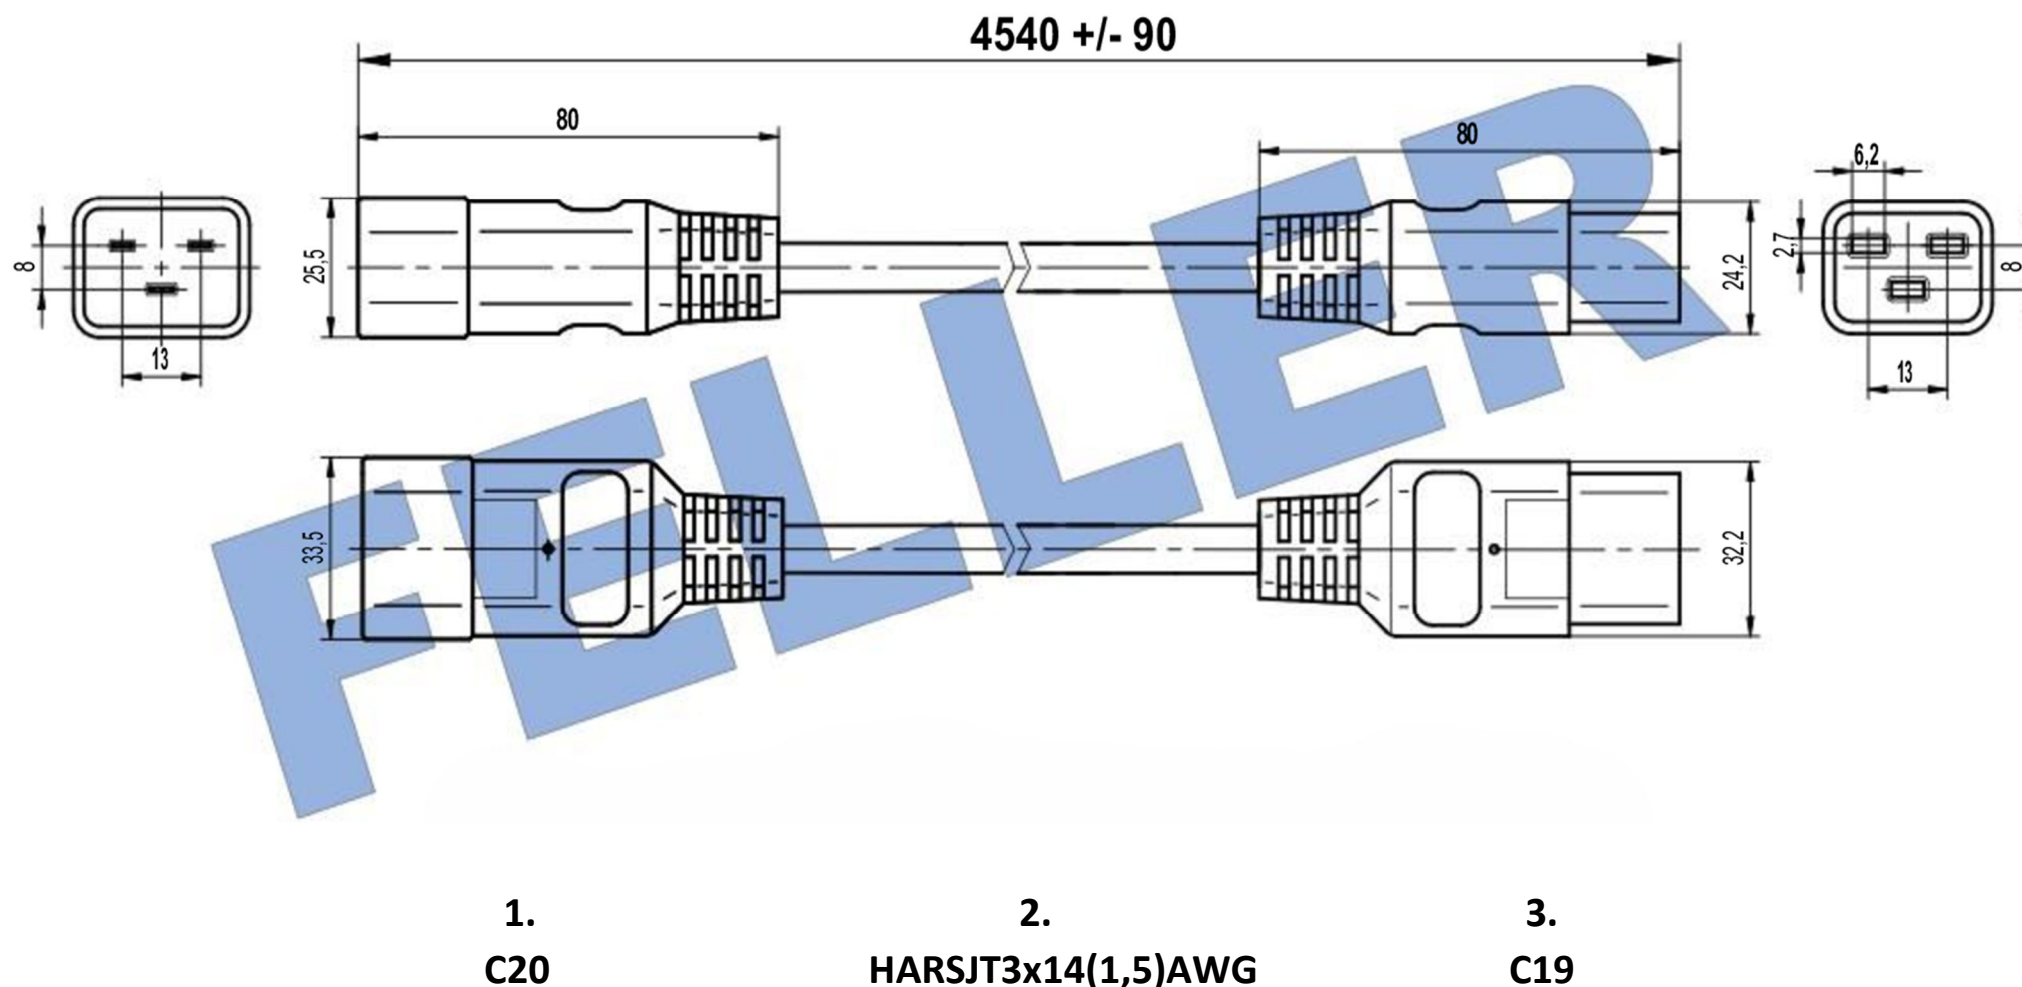

Feller Type : C20 - HARSJT3x14(1,5)AWG - C19 / 4,50m Black

(L95)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z