


1. PLUG : Type BS13/13+1309

Molded plug according to	: BS 1363/A SS145
Rated current and voltage	: 13A, 250 V AC with replaceable fuse 13A
Plug base	: thermoplastic Polyester (PBT) GFR
Construction	: double insulated, contacts crimped
Pins	: line & neutral : solid brass, nickel-plated, part insulated, grounding : solid brass, nickel-plated
Pins dimensions	: line & neutral 6,35mm x 4,00mm grounding 7,90mm x 4,00mm
Mechanical fixation	: Iron wire ZN plated D1,00
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: ASTA, Singapore safety mark, SASO test report
SCPI Database	: 58555e4a-f6bf-4fb9-87b8-0a5bc564ebb1

2. CORD : Type H05RRF3G1,00
BLACK

Flexible cord according to	: EN 50525-2-21, EN 50575, OVE K40
Marked	: *manufacturer*testhouse*<HAR>H05RRF3G
Number of cores	: 3
Conductor construction	: 32x0,20 mm O.D. 1,30mm
Conductor insulation	: Rubber, O.D. 2,40mm +/-0,05mm
Jacket	: Rubber, O.D. 7,20mm +/- 0,30mm
Resistance of conductors	: max. 20 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,010MΩ/km
Color of conductors	: yellow/green, brown, blue
Approvals	: HARMONIZED

3. CONNECTOR : Type C15M+1309

Molded connector according to	: EN/IEC60320/C15
Rated current and voltage	: 10 A, 250 V
Construction	: double insulation
Contacts of the connection	: self-adjusting phosphor bronze CuSn6, crimped
Inner insulation	: housing, PBTP GFR
Max. pin temperature	: 120°C
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, ENEC, KTL

ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)

EU-Directive 2011/65/EU

EU-Directive 1907/2006 EG (REACH -compliant)

High pot test wire to wire: 3kVac for 2 sec

Continuity : 25Aac to grounding /20Aac to line and neutral

Skin high pot test : 6kVac line to skin


TESTING

Electrical testing : 100%

Visual inspection : 100%

Polarity test : yes

COMAREL

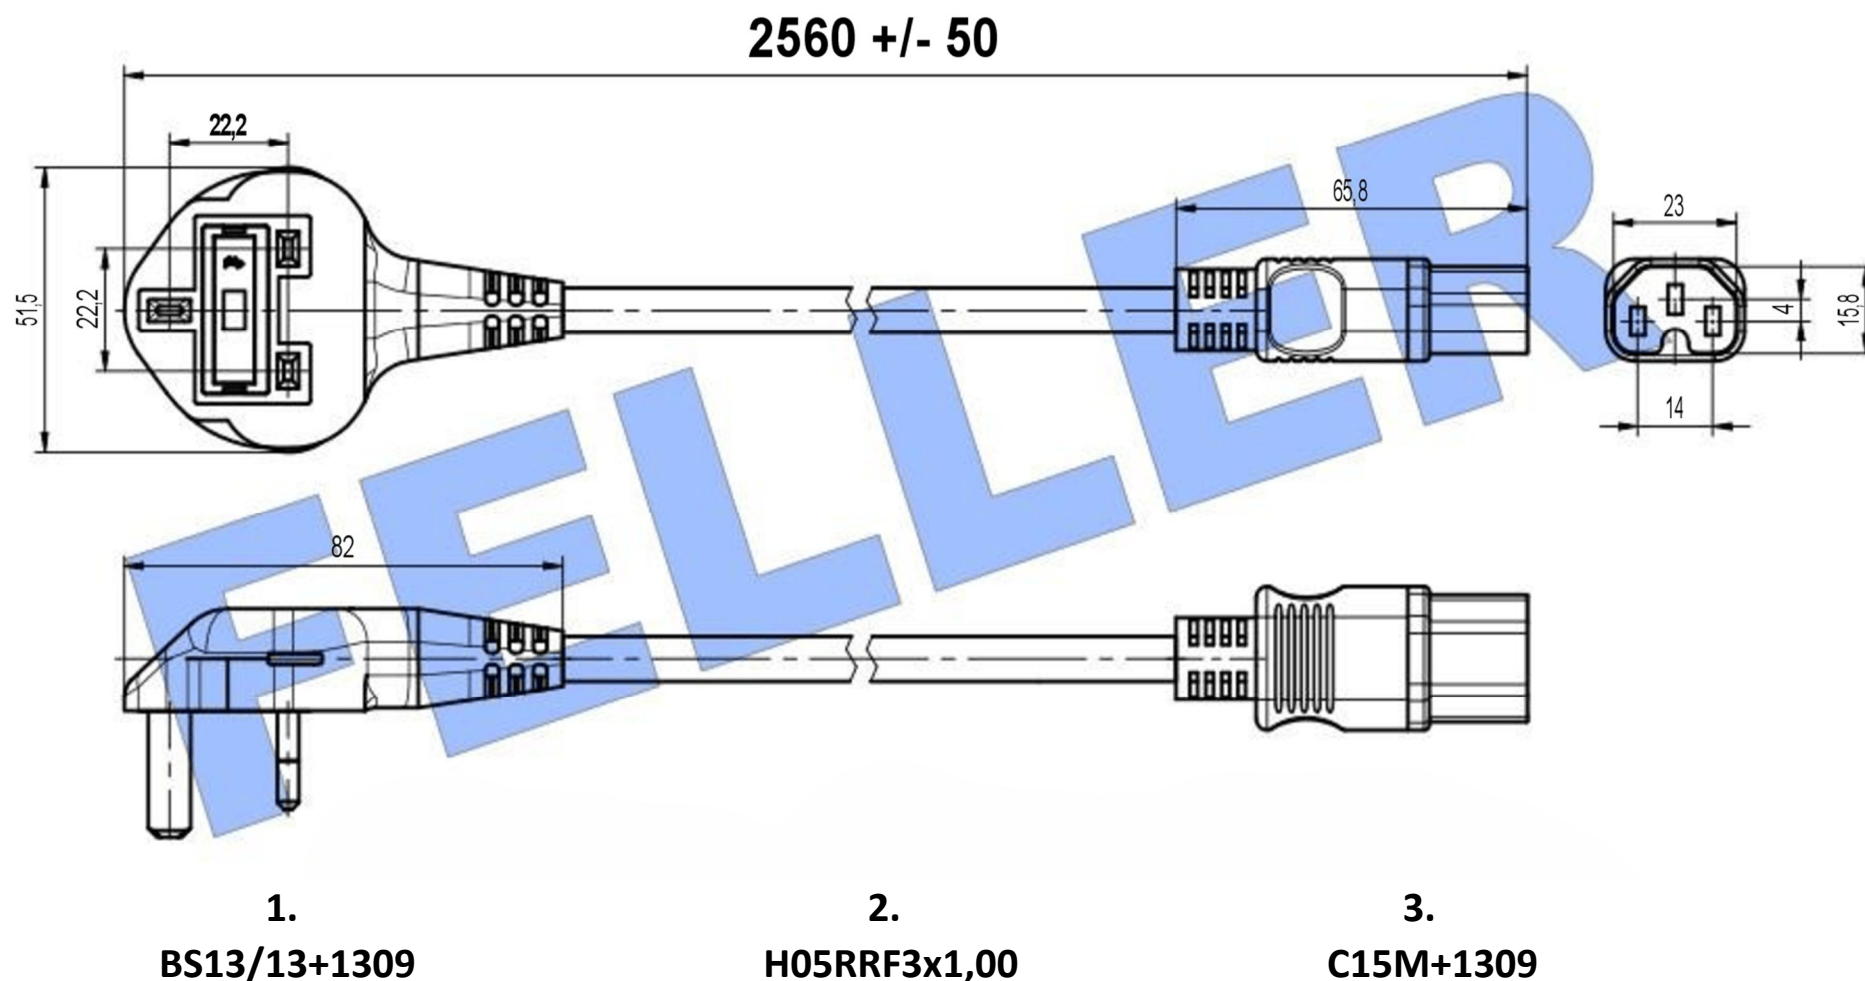

Feller Type : BS13/13+1309 - H05RRF3G1,00 - C15M+1309 / 2,50m Black

(UK4A)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z