

# FELLER GMBH

A-2525 GUENSELSDORF, AUSTRIA - TEL.: .. 43(2256) 62 32 50 - FAX: .. 43 (2256) 62 32 57  
e-mail: sales@feller-at.com <http://www.feller-at.com>

**Description:** SAA/3-H05VVF3G1,00-g25/ 2,50m, black

(L13)

## 1. PLUG: Type SAA/3

Molded plug according to : AS/NZS 3112:2000  
Rated current and voltage : 10 A, 250 V AC  
Plugbase : PPO GFR  
Pins : solid brass, nickel plated, part insulated, crimped  
Pins dimension : 6,35 mm x 1,63 mm  
Outer mold : PVC compound, hardness Shore A75-77  
Approvals : SAA

## 2. CORD: Type H05VVF3G1,00mm<sup>2</sup>

Flexible cord according to : HD 21.S2; AS 3191  
Marked : \*JF\*<ÖVE><HAR>H05VVF3G1,0mm<sup>2</sup>\*N1095\*CE  
\*CCC 227 IEC 53(RVV) 300/500 3x1,0\*VCTF3CX1,0mm<sup>2</sup>  
Number of cores : 3  
Conductor construction : 31x0,195 mm O.D. 1,25mm  
Conductor insulation : Extruded PVC O.D. 2,40mm  
Jacket : Extruded PVC O.D. 6,80mm +/- 0,20mm  
Resistance of conductors : max. 19,5 Ω/km  
Dielectric strength : 2000 Vac, 1min.  
Insulation resistance : 500Vdc>50Mohms  
Color of conductors : yellow/green, brown, blue  
Approvals : HARMONIZED, VDE, ÖVE, CE BEC, KEMA, S, D, N, FI,  
SEV, LCIE, IMQ, BSI, SAA, UCIEE, CCC, KTL

## 3. 2<sup>nd</sup> end preparation: g25

25 mm jacket removed




**Environmental conformity** : EU-Directive 2002/96/EC (WEEE)  
EU-Directive 2003/11/EC (Council Directive 76/769/EEC)  
EU-Directive 2002/95/EC (RoHS-compliant)

## **TESTING**

Electrical testing : 100%  
Visual inspection : 100%  
High pot test wire to wire : 3.000Vac for 2 sec.  
Continuity test : 25Aac to grounding / 20Aac to line and neutral  
Polarity test : yes  
Skin high pot test : 6.000Vac line to skin

Tolerances not indicated in the drawing: +/- 2 %  
design subject to change without prior notice

DATE of ISSUE:	July, 2005		
REV: 1	1	ORIG:	mk

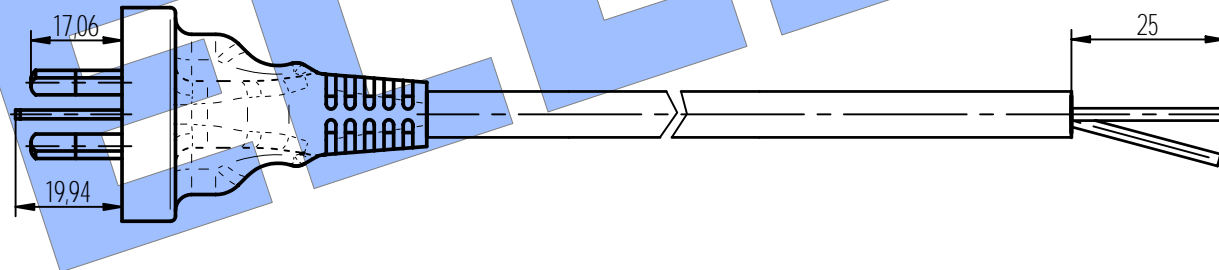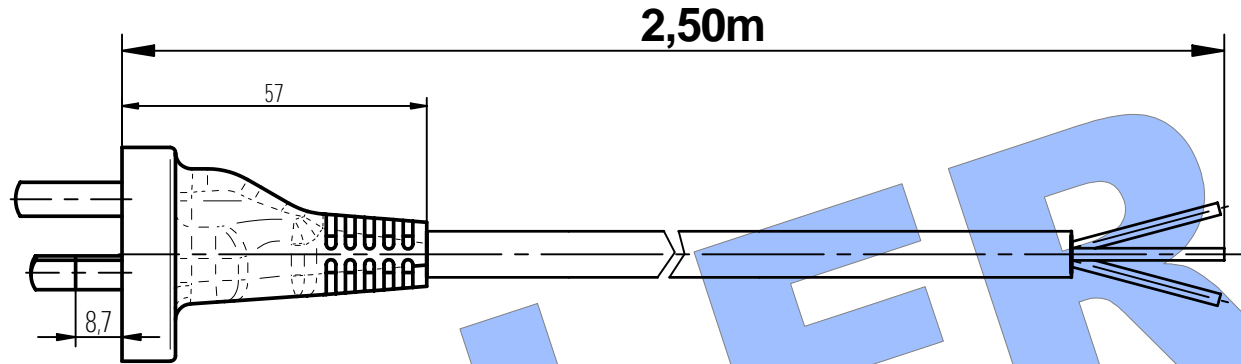

1.  
SAA/3

2.  
H05VVF3G1,00

3.  
g25

**Feller Type: SAA/3-H05VVF3G1,00-g25 / 2,50m black (L13)**

**RoHS compliant**

16.06.05

**All dimensions in mm**

**FELLER** 

A-2525 Günselsdorf, Austria

Telefon 0043-2256-62325-0

Fax: 0043-2256-62325-7

email: [sales@feller-at.com](mailto:sales@feller-at.com)

<http://www.feller-at.com>