



incl. PSE label

1. PLUG : Type 498GJTW

Molded plug according to	: JIS C 8303, CNS690
Rated current and voltage	: 15 A, 125 V AC
Plug base	: PA 6.6 GF
Pins	: solid brass, nickel-plated, crimped
Pins dimension	: grounding O.D. 4,8 mm line and neutral 6,20mm x 1,40 mm
Outer mold	: PVC compound, hardness Shore A75-77
Approvals	: PSE-Mark (JET), BSMI
SCIP Database	: d790a47a-25a5-40e1-95bc-2017a434eeb9

2. CORD : Type CNS HVCTF3x1,25**BLACK**

Flexible cord according to	: CNS 3199, JISC 3306
Marked	: *BSMI MARK*R31947*JF*HVCTF-3x1,25mm2 (50/0.18) *Production Year*<PS>E*JET*JF*HVCTF*3x1.25mm2
Number of cores	: 3
Conductor construction	: 50x0,18 mm
Conductor insulation	: Extruded PVC O.D. 2,70mm +/-0,10mm
Jacket	: Extruded PVC O.D. 7,85mm +/- 0,20mm
Temperature rating	: BSMI -40°C to +75°C PSE (JET) -40°C to +90°C
Resistance of conductors	max. 15,1 Ω/km
Dielectric strength	: 2kVac, 1min
Insulation resistance	: > 0,005MΩ/km
Color of conductors	: green, black, white
Approvals	: PSE Mark (JET), BSMI

3. CONNECTOR : Type C13M

Molded connector according to	: EN/IEC60320/C13, UL817, C22.2 N°.21
Rated current and voltage	13 A, 125 Vac
Construction	: double insulation, contacts crimped
Contacts of the connection	: self-adjusting phosphor bronze CuSn6
Inner insulation	: PPO GFR
Outer mold	: PVC compound, hardness Shore A 75-77
Approvals	: CE UKCA, PSE-Mark (JET), BSMI

ENVIRONMENTAL CONFORMITY

EU-Directive 2012/19/EU (WEEE)
EU-Directive 2011/65/EU
EU-Directive 1907/2006 EG (REACH - compliant)


TESTING

Electrical testing : 100%	High pot test wire to wire: 3kVac for 2 sec
Visual inspection : 100%	Continuity : 25Aac to grounding /20Aac to line and neutral
Polarity test : yes	Skin high pot test : 6kVac line to skin

Design subject to change without prior notice

February 2025 / Rev : 0 / JMP

COMAREL

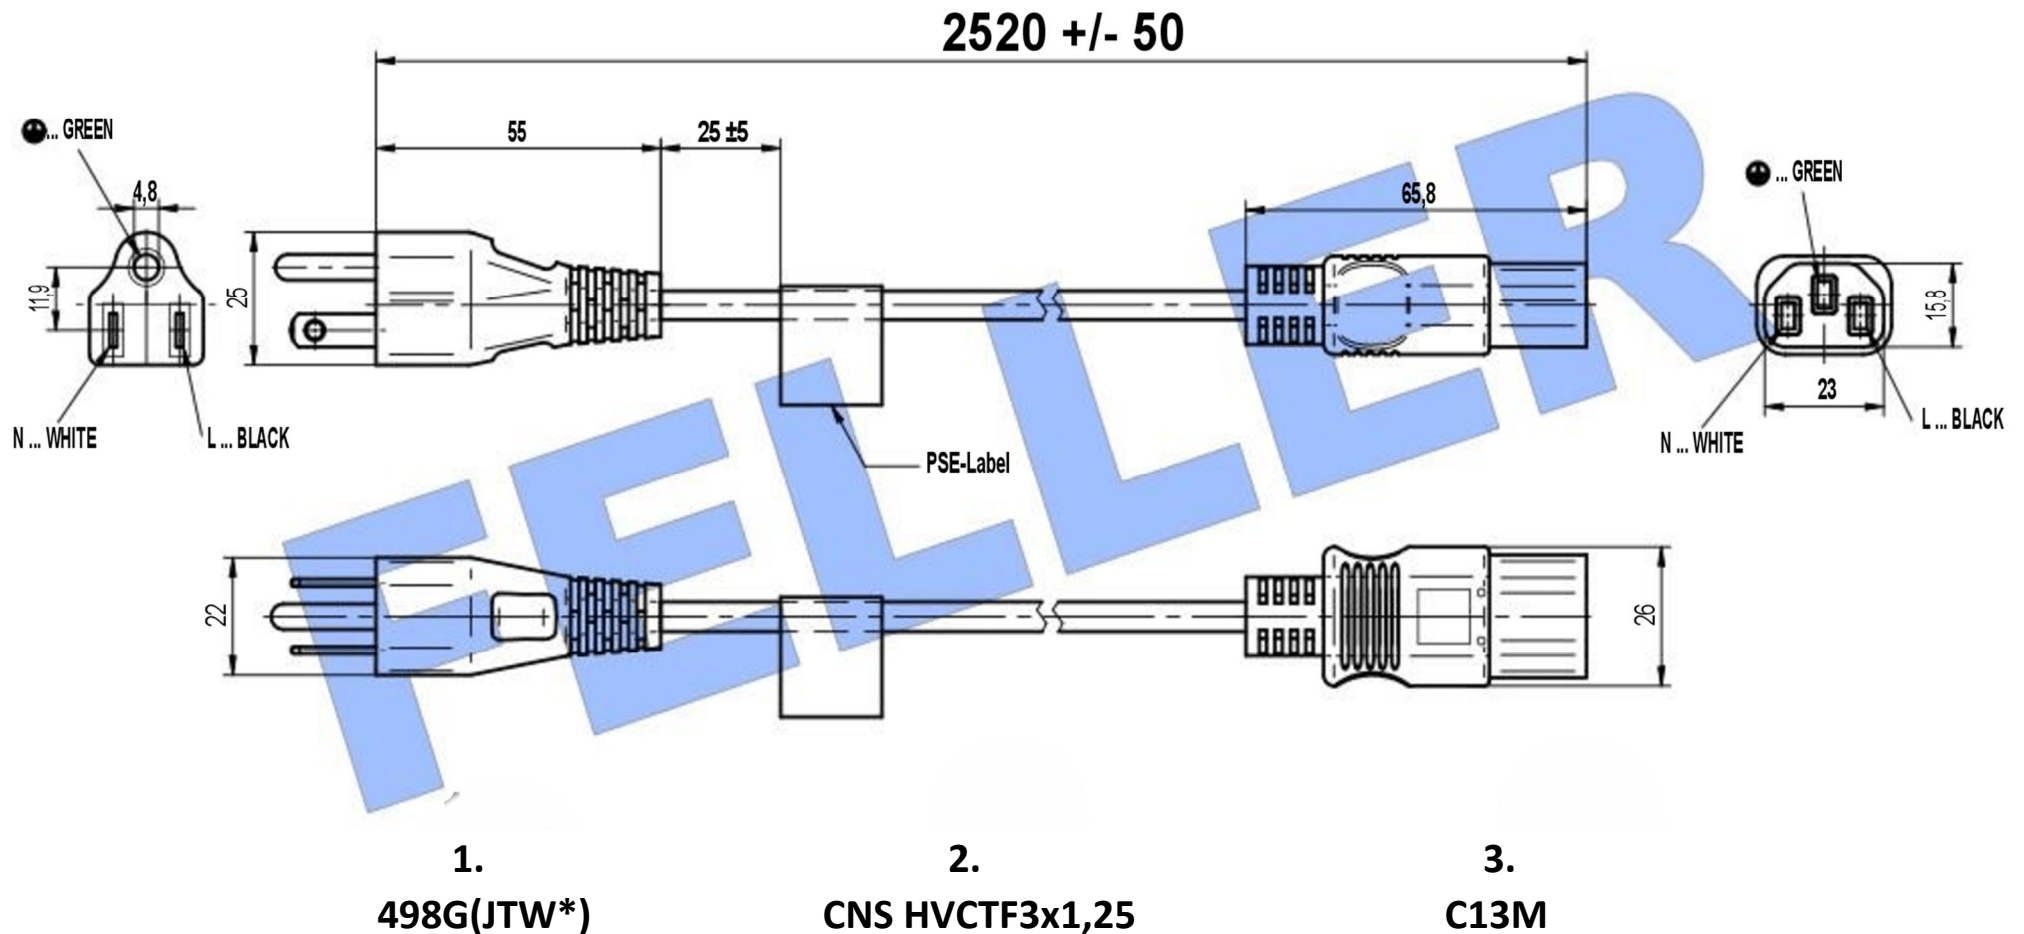

Feller Type : 498GJTW - CNS HVCTF3x1,25 - C13M / 2,50m Black

(L70B)

All dimensions in mm

ROHS compliant

WWW.COMAREL.FR

136, Rue du 18 Juin – ZA DES METIERS – F-95120 – ERMONT - FRANCE

Tel : +33 1 34 13 72 80 – Mail : info@comarel.fr

SAS AU CAPITAL.DE 50000 EUROS – R.C.S PONTOISE B408 977 643 – SIRET 408 977 643 00027 -APE 4652 Z